

Committed to the needs of our customers since 1927

15 Corporate Circle Albany, NY 12203 518.243.8834

www.NATIONAL1927.com





A Document Solution for

ALBANY COUNTY

Bid Solicitation # 2022-021



Steven Gordon
sgordon@NATIONAL1927.com
518.243.8834



TABLE OF CONTENTS

- 1) NATIONAL History and Mission Statement
- 2) NATIONAL TEAM Assigned to Albany County
- 3) Account Management / Training / Service
- 4) Albany County Response Team
- 5) Gold Alliance Guarantee
- 6) Proposal Response Requirements Section F
- 7) Proposed Devices
- 8) National Lease and Service Agreement Template
- 9) FM Audit Technical Whitepaper (Data Collection Agent)
- 10) Cost Proposal Form Proposal Identification BF1-BF3
- 11) Proposed Machine Configuration and Pricing





MISSION STATEMENT

NATIONAL is an experienced group of professionals committed to the needs of our customers since 1927.

- We provide world-class business technology to improve our clients' productivity.
- We are driven to be the most knowledgeable and best prepared to serve our clients' needs.
- We respond to our clients' service needs with a sense of urgency.
- We hold ourselves to the highest standards of honesty and integrity.
- We are committed to the success of our community.



HISTORY

Opening for business in 1927, The Camera Exchange is where our history began, providing photo and camera supplies to the public. After a name change to State Photo and a move uptown, the business continued to grow and began supplying a wider range of products.

In 1952 NATIONAL began selling and servicing the Kodak Verifax photocopier. This was our first entry into the business equipment market; an entrance that would lead to the opening of the NATIONAL Business Equipment division.

As business technology continued to improve, our customers asked us to provide more world-class equipment and services. In 1995 our products transitioned from analog to digital. It was important for our team to support our customers with business connectivity support. Connecting digital business equipment to our customers IT network lead us to create a new support service through NATIONAL IT Services.

In 2017, NATIONAL celebrates its 90th year and operations today have expanded to include more products and services than ever before. It is for that reason, a final change in name was settled on: NATIONAL Business Technologies.

Through the years of selling photocopiers, we have seen many changes and advancements in office technology. One thing that has not changed, however is the superior service that customers can expect from NATIONAL. From the moment the doors opened in 1927, the customer has always been our highest priority.









1927


2016



WORLD-CLASS SERVICE

- Our Philosophy Towards Service Repair:
 - o Please refer to our Gold Alliance Guarantee on the following page.
- NATIONAL's Response Time To Service Calls:
 - The dedicated NATIONAL Technician will call Albany County within one hour of being notified of the service call being placed.
 - NATIONAL guarantees to have the service call completed within Four Hours from when the initial call was placed.
- NATIONAL's Service Technician Team
 - We employ 23 Technicians throughout the Organization
 - o We will assign a Total of Three Techs to Albany County:
 - One Primary Technician who classifies on our Diamond Category (highest ranking), Two Additional Technicians will be assigned to Albany County as well, also of the Diamond Ranking.
 - All Techs are full lined trained by the manufacturer to include ongoing manufacturer training as new models are introduced. NATIONAL also holds internal training and testing to ensure our Techs maintain the highest level of service.
 - The manufacturer conducts annual evaluations to determine the best techs in the region and the country. NATIONAL employs a tech who was selected one of the top ten in the country. Also NATIONAL uses an independent company to evaluate the service department and each tech. NATIONAL has one of the top 5 BEI rated techs in the country along with a number of Diamond, Platinum, and Gold rated Techs. The NATIONAL Service department as a whole is rated as a Platinum Dealer. All Techs are incentivized through BEI to provide excellent service.
- Procedure for Placing Service Calls:
 - Service calls can be placed by phone, email, or through the online web portal.
 - Our technicians are dispatched electronically through Remote Tech
- Average Number of Copies Between Service Calls.
 - Our Diamond Level ranked technicians average 183,468 copies between service calls.
- Average Response Time for Service Call 2.3 Hours from Initial Call



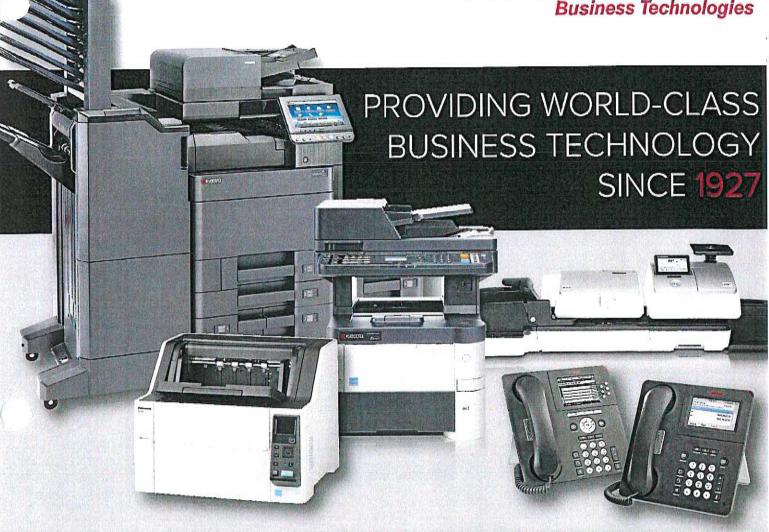

- PRINTERS & COPIERS
- MULTIFUNCTIONAL PRINTERS
- MANAGED PRINT SERVICES
- PRODUCTION PRINTERS
- WIDE FORMAT PRINTERS

- PHONE SYSTEMS
- SMART BOARDS
- IT SERVICES
- MAILING MACHINES
- SCANNERS































NFS is a comprehensive, cost-effective remote monitoring solution that saves both time and money.

Technicians can monitor devices in real-time, anticipate issues, even update firmware remotely during off-peak hours – maximizing uptime, making sure business gets done.

NFS also provides comprehensive usage data: Which devices get used the most? Which the least? Is there too much color printing? Or not enough? Over time, the entire document infrastructure can be optimized to best meet the unique and evolving needs of every organization.

NFS is hosted off-site in the highly secure Microsoft Azure cloud, minimizing burden on IT staff.

More consistent uptime for all devices in your fleet

- Real-time device diagnostics and alerts
- Convenient firmware updates
- Remote error resolution, code-resetting
- Supply-level monitoring
- Fewer on-site visits

Deeper understanding of needs through usage data

- · Identify trends, user requirements
- Right-size devices across your fleet
- · Detailed analytics and graphic reports
- · Optimize device configuration to meet needs

Available to technicians and in-house admins

- NFS can be adapted to any customer need
- Virtually eliminates need for maintenance by enusers
- Ability to restore deleted information
- Increase productivity by remotely importing and exporting address book data



WHY NATIONAL?

- · Local, New York based organization
- GUARANTEED SAME DAY SERVICE OR YOUR MONEY BACK
- Quarterly account reviews ensure utmost efficiency
- · Most reliable technology available
- BEI & ENX Magazine Office Technology Service Excellence Award-Platinum Level
 Service Provider
- Over half our technicians have received national recognition
- Out of over 13,000 service technicians across the country, 3 of our technicians are top 1%



Your National Business Technologies Team

Dedicated to Your success



Scott Mueller CEO/President smueller@national1927.com



Steve Gordon
Senior Account Manager
sgordon@national1927.com
(518) 724-6455 x3276



Larry Scott
Service Manager
Iscott@national1927.com
(518) 724-6455 x3284



Russ Mahar Senior Systems Engineer rmahar@national1927.com (518) 724-6455 x3157



Ebony Jean-Louis
Admin Specialist
ejeanlouis@national1927.com
(518) 724-6455 x3270



Robert Pospisil
Service Technician
rpospisil@national1927.com
(518) 724-6455 x3294



ACCOUNT MANAGEMENT

Senior Account Executive Steven Gordon will oversee and manage every aspect of the account utilizing managers of each of NATIONAL's departments that have an impact on the Albany County account. Regularly scheduled quarterly review meetings will include information on:

- Implementation and Integration
- Connectivity Support
- Service and Supplies
- Training
- Billing

TRAINING PROCESS

NATIONAL will provide unlimited training for all aspects of the account throughout the term of the contract on copying, faxing, printing and scanning.

The Steps:

- Initial Installation phase of training.
- 2. Scheduled detail corporate training to all staff throughout the company.
- 3. Scheduled follow-up training no more than 2-3 weeks from Step 2.
- Quarterly training scheduled for new employees or follow-up with current employees.
- 5. In-Service training at the beginning of each year.

EQUIPMENT DEMONSTRATION

- Full demonstrations for all proposed equipment are available at 15 Corporate Circle, Albany, NY location. Our Digital Lab is equipped with the full product line of MFP's proposed.
- Onsite demonstrations are available to customers.
- Solutions Specialist Russ Mahar will lead all demonstrations of machines. In addition, Russ will aid in ensuring all print jobs are correct to Albany County account's satisfaction.
- Steven Gordon, Larry Scott, and other supporting staff members participate in all demonstrations.

RESPONSE TEAM: Albany County

Steven Gordon – Senior Account Executive sgordon@national1927.com	518.243.8834 - CELL
Shawn Saville – COO ssaville@national1927.com	518.724.6455 x 3280
Paul Caputo – Director of Technology pcaputo@national1927.com	518.724.6455 x 3277
Russ Mahar, Senior Systems Engineer rmahar@national1927.com	518.724.6455 x 3157
Larry Scott - Service Manager Iscott@national1927.com	518.724.6455 x 3254
Scott Mueller – CEO smueller@national1927.com	518.724.6455 x 3217





GOLDAlliance GUARANTEE

WE GUARANTEE 100% CUSTOMER SATISFACTION

Guaranteed Service Response
Guaranteed Service Performance
Guaranteed World-Class Products

"Our equipment and service is guaranteed.

If we fail to perform to your guaranteed standards,
we'll replace the equipment or refund
your service money."



800.900.1927 www.national1927.com



YOUR GUARANTEE

Hardware Terms and Conditions

NATIONAL Business Technologies will service all equipment to manufacturer's recommendations and, if unable to satisfactorily service a NATIONAL product in the field, a loaner will be provided at no charge while in-shop repairs are performed. If a NATIONAL product is unable to be satisfactorily repaired, a comparable replacement model will be provided at no charge.

All NATIONAL products are covered for a period of five years, provided that the original unit is continuously maintained under a NATIONAL maintenance agreement from the date of installation.

We guarantee same day service.

All NATIONAL service calls will have an average six-hour response time (Mon-Fri 8am-5pm). The six-hour response time will be reviewed annually. If NATIONAL fails to meet an average six-hour response time, NATIONAL will refund your service money in the form of a check for the last month's service.

This guarantee:

- Applies to equipment that has not been damaged or destroyed by customer abuse or acts of nature.
- · Applies if the customer's account is current.

Software Terms and Conditions

If NATIONAL is unable to complete the Scope of Work, NATIONAL will refund your professional services and software money.

All NATIONAL Software application versions are supported as stated in the Scope of Work by NATIONAL and said software vendor, until the software vendor discontinues support for the software application.

This guarantee:

- Applies to software issues that are known by NATIONAL and said software vendor but precludes
 external factors that may affect the software (e.g., hardware changes or changes in other software
 on the system).
- · Requires the client to provide proper resources stated in the Scope of Work.
- · Applies if the customer's account is current.
- · Loss of data is not covered

NATIONAL Gold Alliance Guarantee Authorization Form

Customer:	Date:
Customer Signature:	
Print Name and Title:	
NATIONAL Account Manager Signature:	
Print Name and Title:	
Authorized NATIONAL Signature:	
Madel: Serial Number:	





PROPOSAL RESPONSE REQUIREMENTS

F. PROPOSAL RESPONSE REQUIREMENTS

National's response to this solicitation includes or address the following:

- Identify the National Cooperative Contract being utilized for purposes of this solicitation.
 - TCPN Contract # R150301
- Address the Scope of Services, indicating your agreement to comply with provisions as stated, or identifying any exceptions taken.
 - National Business Technologies agrees to comply with provisions as stated in the Scope of Services. Scan To Email can be restricted to domain(s).
- 3. Indicate your acceptance of the provisions of the attached "Standard Clauses for Albany County Agreements".
 - National Business Technologies accepts the provisions of the attached "Standard Clauses for Albany County Agreements".
- 4. Indicate whether models proposed may be viewed locally by County representatives who wish to examine the model(s) offered before contracting the lease.
 - National welcomes any County representatives to our showroom located at 15
 Corporate Circle, Albany, NY 12203 to view any proposed equipment. We kindly
 ask for 5 business days advance notice to accommodate your request.
- 5. At a minimum, address the following:
 - a) How is service provided (direct or through dealer/rep)?
 - Service will be provided by National Business Technologies, an authorized Kyocera Dealer. Larry Scott is our local Service Manager (518-724-6455).
 - b) What is standard response time for repair/maintenance service requests? Is the response time frame guaranteed?
 - We guarantee same day service. All National Business Technologies service calls will have an average four hour response time (Mon-Fri 8am,-5pm). The four hour response time will be reviewed annually. If National fails to meet an average four hour response time, National will refund your service money in the form of a check for the last month's service.

- Include a copy of your standard contract document as established through your referenced national cooperative contract.
 - Our standard lease agreement and Gold Alliance service agreements are attached. National Business Technologies will be the only vendor servicing and maintaining the systems.
- d) Identify how security of data stored on the machine is ensured.
 - Kyocera's Data Security Kits offer 1x or 3x Overwrite Method, Data Encryption,
 Password Protection for Administrators, as well as, Automatic and Manual
 Deletion Modes. All data stored on the machine shall be encrypted and hard
 drives equipped to automatically overwrite images with technology meeting
 Department of Defense (DoD) standard 5220.22M.
- e) Identify any models proposed which have hard drives.
 - Kyocera Taskalfa 3554ci, 4004i, 4054ci, 5004i, 5054ci, 6004i
- f) Identify any machines proposed which require electrical service greater than standard 110V
 - No proposed machines require electrical service greater than standard 110V.
- g) Identify how meter reads are taken per Machine.
 - Meter reads will be taken through FM Audit (whitepaper attached) as a preliminary and National Fleet Services as a secondary.



PROPOSED DEVICES*

Device Types Listed On Minimum Machine Specifications Spreadsheet Correspond With Proposed Device Pages



TYPE A - TASKalfa 4004i

- *Configuration:
- B&W Print, Scan, Copy
- 140 Sheet Document Processor
- (2) 500 Sheet Paper Drawer
- 500 Sheet Internal Finisher
- Surge Protector





Recommended KYDEER3 Solution:

TYPE B - TASKalfa 5004i

- B&W Print, Scan, Copy
- 140 Sheet Document Processor
- (2) 1500 Sheet Paper Trays
- Booklet Folding Unit
- 4,000 Sheet Finisher
- Surge Protector





TYPE C- TASKalfa 4054ci

- Color Print, Scan, Copy
- 140 Sheet Document Processor
- (2) 500 Sheet Paper Drawer
- 500 Sheet Internal Finisher
- Surge Protector





TYPE D - TASKalfa 4054ci

- *Configuration:
- Color Print, Scan, Copy
- 140 Sheet Document Processor
- 500 Sheet Internal Finisher
- (4) 500 Sheet Paper Drawer
- 3,000 Sheet Large Capacity Paper Tray
- Surge Protector





TYPE E - TASKalfa 6004i

- *Configuration:
- B&W Print, Scan, Copy
- 140 Sheet Document Processor
- (4) 500 Sheet Paper Drawer
- 1,000 Sheet Finisher
- Surge Protector





TYPE F - TASKalfa 6004i

- B&W Print, Scan, Copy & Fax
- 140 Sheet Document Processor
- (2) 500 Sheet Paper Trays
- 1,000 Sheet Finisher
- Surge Protector





TYPE G - ECOSYS M2540

- B&W Print, Color, Scan
- 32 GB SD Card
- 250 Sheet Paper Drawer
- Surge Protector





Recommended KYDCERa Solution:

TYPE H - TASKalfa 3554ci

- Color Print, Scan, Copy & Fax
- 140 Sheet Document Processor
- 500 Sheet Internal Finisher
- (2) 500 Sheet Paper Trays
- (2) 1500 Sheet Paper Trays
- Surge Protector





TYPE I - TASKalfa 5004i

- *Configuration:
- B&W Print, Scan, Copy
- 140 Sheet Document Processor
- 500 Sheet Internal Finisher
- (2) 500 Sheet Paper Trays
- Surge Protector





Recommended 🌠 KUDEERa Solution:

TYPE J - TASKalfa 5004i

- *Configuration:
- B&W Print, Scan, Copy &
- 140 Sheet Document Processor
- 500 Sheet Internal Finisher
- (4) 500 Sheet Paper Trays
- Surge Protector





Recommended **₹**KUDERR Solution:

TYPE K - TASKalfa 3554ci

- Color Print, Scan, Copy
- 140 Sheet Document Processor
- 500 Sheet Internal Finisher
- (2) 500 Sheet Paper Trays
- Surge Protector





TYPE L - TASKalfa 5054ci


- Color Print, Scan, Copy & Fax
- 320 Sheet Dual Scan Document Processor
- (2) 500 Sheet Paper Trays
- 500 Sheet Internal Finisher
- Surge Protector





TYPE M - TASKalfa 5004i


- Print, Scan, Copy
- 140 Sheet Document Processor
- (2) 1500 Sheet Paper Trays
- 500 Sheet Internal Finisher
- Surge Protector

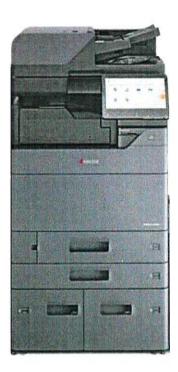



Evolve Printing in Your Workplace

The Kyocera Evolution Series has arrived to provide your workplace with the latest technology required to keep your data safe while optimizing workflows. With an easy-to-use control panel and innovative security enhancements, you can rely on the Kyocera Evolution Series for high-quality printing, copying and scanning.

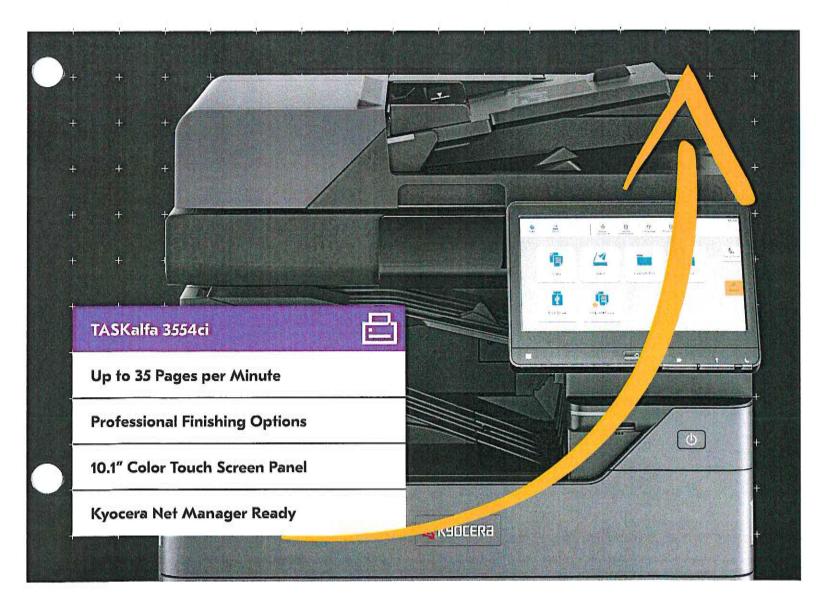

TASKalfa 3554ci

BASIC SPECIFICATIONS

Configuration: Color Multifunctional System - Print/Scan/ Copy/Optional Fax

Speed: Color and Black — Letter: 35 ppm, Legal: 21 ppm, Ledger: 17 ppm, 12" x 18": 17 ppm (print only)

Warm Up Time: 18 Seconds or Less (power on)

First Page Outs

Copy: 5.3 seconds or less Black, 7.0 seconds or less Color Print: 5.9 seconds or less Black, 7.7 seconds or less Color

Display: 10.1" Color Touch Screen Control Panel

Memory/Hard Disk Drive: 4GB RAM/32GB SSD/320GB HDD Standard, 1TB HDD (option)

Duplex: Standard Stackless Duplex supports Statement (5.5" x 8.5") to Ledger (12" x 18"), 16 lb. Bond - 142 lb. Index (60 — 256gsm)

Standard Output Tray: Statement — 12" x 18"/500 Sheets; up to 12" x 48" Banner (single sheet)

Electrical Requirements: 120V, 60Hz, 12A; 220-240V, 50/60Hz, 7.2A

Typical Electricity Consumption (TEC): 120V: .46 kWh/week; 220V: .44 kWh/week

Dimensions: 23.7" W x 26.1" D x 31.1" H

Weight: 198.4 lbs

Maximum Monthly Duty Cycle: 125,000 Pages per Month

PAPER SUPPLY

Standard Paper Sources: Dual 500 Sheet Trays, 150 Sheet MPT, Auto Selection/Switching

Optional Paper Sources: Dual 500 Sheet Trays (PF-7140)
Dual 1,500-sheet Trays (PF-7150) 3,000 Sheet Capacity Tray
(PF-7120),

Paper Capacity: Standard: 1,150 Sheets; Maximum: 7,150 Sheets

Paper Size: Tray 1 — 5.5" x 8.5" — 8.5" x 14" (statement to legal); Tray 2 — 5.5" x 8.5" — 12" x 18", Custom Size PF-7140; 5.5" x 8.5" — 12" x 18" PF-7150, PF-7120; 8.5" x 11" MPT: 5.5" x 8.5" — 12" x 18" (multiple sheets); Up to 12" x 48" Banner (single sheet)

Paper Weight:

Trays/MPT: 14 lb. Bond — 166 lb. Index (52 — 300gsm)

Input Materials:

Slandard/Optional Trays: Plain, Bond, Recycled, Preprinted, Vellum, Color, Pre-Punched, Thick, Thin, High Quality, Letterhead, Envelope, Custom; MPT: Plain, Bond, Recycled, Preprinted, Vellum, Color, Pre-Punched, Thick, Thin, High Quality, Transparency (OHP), Coated, Index Tab, Label, Letterhead, Envelope, Custom

SECURITY SPECIFICATIONS

Local Authentication, Network Authentication, Encryption Communication (IPsec, HTTPS, LDAPS, SMTP/POP/FTPS over TLS 1.3, SNMPv3), TPM chipset (Trusted Platform Module), S/MIME, SCEP (auto certificate issuance/renewal), OCSP/CRL (certificate validation), Secure Boot (firmware authenticity verification), Run Time Integrity Check, Data Security Kif 10 enhances IPsec communication (support for FIPS140-2), HDD and Memory Overwrite (7x) Mode and HDD Data Encryption (256 bif), Common Criteria (ISO/IEC-15408/EAL2), IEEE 2600.2

PRINT SPECIFICATION

Standard Confroller: ARM Cortex-A53/1.6GHz

PDLs/Emulations: PRESCRIBE, PCL6 (PCL-XL/PCL-5c), KPDL3 (PS3), XPS, OPEN XPS, PDF; Optional (UG-34): IBM ProPrinter, Line Printer, LO-850

Print Resolution: Up to 4800 x 1200 dpi

Fonts: KPDL3, PCL6, Bitmap

OS Compatibility: Windows: 8.1/10/Server 2012/Server 2012 R2/Server 2016/Server 2019; Mac OS X v10.0 or later; Chrome OS

Mobile Printing: Apple AirPrint®, Mopria®, KYOCERA Mobile Print, KYOCERA MyPanel

Interfaces: Standard: 1000 Base-T/100-Base-Tx/10BASE-T (IPv6, IPv4, IPsec), 802.3az ready, High-Speed USB 3.0, 4 Speed USB 2.0 Host Interfaces, 2 Expansion Slots, IEEE 802.11b/g/n Wireless LAN (communication distance 98.5 feet); Optional: IEEE 802.11a/b/g/n/ac (IB-37 for 2.4/5GHz), 10/100/1000BaseTX (IB-50 for Dual NIC); IEEE 802.11b/g/n (IB-51 for Wireless LAN Interface (communication distance 338.1 feet))

Network Print and Supported Protocols: HTTPS, FTPS, SNMP v1/v2c/v3, Raw Part (Port 9100) TCP/IP, IPv4, IPv6, DHCP LPR, DNS, WSD Scan/Print

Drivers: KX Driver, PCL Mini Driver, KPDL Mini Driver, KX Driver for XPS, Network Fax Driver, TWAIN Driver, WIA Driver, Status Monitor, Common Profile, Output to PDF, Security Watermark, Color Optimizer, MAC Driver, Chrome Print Driver, Linux Driver, KX Driver with Distributed Printing, Windows Inbox Driver, SANE Driver, Google Chrome Driver

Utilities: KYOCERA Net Viewer, KYOCERA Device Manager, KX PRESCRIBE and Macro Generator, Quick Setup, KYOCERA Net Manager, ID Register, Software Management Service, Upgrade Studio, Web Package Builder/Maker, Removal Tool, Wi-FI Setup Tool, PDF Direct Print, Command Center RX

SCAN SPECIFICATION

Scan Type: Color and Black & White Scanner

Scan Resolution: 600 dpl, 400 dpl, 300 dpl, 200 dpl, 200 x 100 dpl, 200 x 400 dpl

File Formats: TIFF, JPEG, XPS, OpenXPS, PDF (MMR/ JPG Compression/High Compression PDF/A-2.0); Option: Scen Extension Kit Text Searchable PDF; MS Office File

Connectivity/Supported Protocols: 10 BASE-T/100 BASE-TX/1000 BASE-T (IPv6, IPv4, IPsec) TCP/IP, Hi-Speed USB 3.0

Scanning Functions: Scan-to-Folder (SMBv3), Scan-to-Email, Scan-to-FTPS, Scan-to-FTPS over TLS 1.3, Scan-to-USB, Specified Color Removal, Border Erase, Preview

Original Size: Document Processor: 5.5" x 8.5" — 11" x 17"; Glass: Up to 11" x 17"

Drivers: TWAIN/WIA/DSM-SANE Driver, WSD Scan

OPTIONAL DOCUMENT PROCESSORS₂
Acceptable Originals: 5.5" × 8.5" — 11" × 17"

DP-7140: Reversing Automatic Document Processor/50 Sheets Speed: Simplex: 50 ipm (BW Cotor); Duplex: 16 ipm (BW/Cotor) Weight; Simplex: 13 lb. Bond – 90 lb. Index (45 – 160gsm); Duplex: 16 lb. – 32 lb. Bond (50 – 120gsm)

DP-7150: Reversing Automatic Document Processor/140 Sheets Speed: Simplex: 80 ipm (BW Color); Duplex: 48 ipm (BW/Color) Weight: Simplex: 13 lb. Bond – 90 lb. Index (35 – 160gsm); Duplex: 16 lb. – 32 lb. Bond (50 – 120gsm)

DP-7160 (with multi-feed detection):

Dual Scan Document Processor/320 Sheets Speed: Simplex: 100 ipm BW/Color); Duplex: 200 ipm (BW/Color) Weights: Simplex: 13 lb. And staple bond — 120 lb. Index (35 — 220gsm); Duplex: 16 lb. — 120 lb. Index (50 — 220gsm)

DP-7170 (with multi-feed and staple detection):
Dual Scan Document Processor/320 Sheets Speed: Simplex: 100
ipm (BW/Color); Duplex: 200 ipm (BW/Color) Weights:
Simplex: 13 lb. Bond — 120 lb. Index (35 — 220gsm); Duplex: 16
lb. — 120 lb. Index (50 — 220gsm)

COPY SPECIFICATIONS

Copy Resolution: 600 x 600 dpi

Image Mode: Text, Photo, Text/Photo, Graphic/Map

Continuous Copy: 1 - 9,999

Additional Features: Auto Magnification, Auto Paper Select, Combine Copy, Mirror Image, Rotate Copy, Border Erase, Spitl Copy, Margin Shift, Page Number, Form Overlay, Blank Page Skip, Specified Color Removal, Proof Copy, Preview, ID Card Copy, Handwriting Emphasis, Super Resolution

Job Management: 1,000 User Codes, Job Build, Shortcut Keys, Repeat Copy

Magnification/Zoom: Full Size, 4 Reduction, 4 Enlargement Preset Ratios, 25 — 400% in 1% Step Increments

Document Box: Custom Box, Job Box, USB Drive Box, Fax Box (with optional Fax System)

OPTIONAL FAX SPECIFICATIONS Fax Type: Fax System 12 (option)

Type/Dafa Compression: G3 Fax/MMR, MR, MH, JBIG

Transmission Speed/Modem Speed: Less than 3 seconds/33.6 Kbps

Fax Memory: Standard 170 MB

Driver: Network Fax Driver

Fax Functions: Network Fax, Duplex Transmission and Reception, Encrypted Transmission and Reception, Polling Transmission and Reception, Broadcast, Fax Server Integration, Fax Dedicated Paper Feed Tray, Pax Forwarding to email or file

SOLUTIONS AND SERVICES

Remote Management

Kyocera Fleet Services ready! A highly secure cloud-based monitoring solution that offers real-lime visibility into your fleet. Optimize device uptime and be notifled when to replenish supplies. Streamline billing with seamless 3rd party application integration, allowing you to focus solely on your business.

Printing Software

Cost Control & Security, Cloud & Mobile, Printer Management

Content Services

Scan & Connect, Intelligent Process Automation, Enterprise Content Management

IT Solutions

Technology Solutions, including solutions for Cloud and Data Centers; Network Infrastructure, Cybersecurity Solutions, Collaboration Solutions

Consulting Services

Including IT Health Check, CIO as a Service, Healthcare Compliance, Backup and Recovery Planning

Professional Services

Including Design and Architecture, Project Implementation, Project Management

Managed Services: Including Holp Desk Services, Retainer Services and On-site Support

Output & Finishing Options₃

OPTIONAL 250 SHEET INNER SHIFT TRAY JS-7110 Stack Capacity: 250 Sheets

Paper Size: 8.5" x 11" - 11" x 17"

Paper Weight: 14 lb. Bond - 166 lb. Index (52 - 300gsm)

OPTIONAL 500 SHEET INTERNAL FINISHER DF-71004 Stack/Staple Capacity: 500 Sheets/50 Sheets

Paper Size: 5.5" x 8.5" - 12" x 18"

Paper Weight: 14 lb. Bond - 166 lb. Index (52 - 300gsm)

Edge Staple Position: 3 Positions: Front 1 Staple, Edge 1 Staple,

Optional Punch: PH-7100 2/3 Hole Punch Unit, Supports 5.5" x 8.5" - 12" x 18"; 14 lb. Bond - 166 lb. Index (52 -300asm)

Dimensions: 19.4" W x 21" D x 6.9" H

OPTIONAL 1,000 SHEET FINISHER DF-71204 Stack/Staple Capacity: Main Tray: 1,000 Sheets/50 Sheets (up to 24 lb. Bond [90gsm])

Paper Size: 5.5" x 8.5" - 12" x 18"

Paper Weight: 14 lb. Bond - 166 lb. Index (52 - 300gsm)

Edge Staple Position: 3 Positions: Top Left, Bottom Left, Center Bind

Optional Punch: PH-7A 2/3 Hole Punch Unit, Supports 5.5" x 8.5" - 12" x 18"; 14 lb. Bond - 166 lb. index (52 -

Dimensions: 21.6" W x 24.4" D x 41.3" H

OPTIONAL 4,000 SHEET FINISHER DF-71404 Stack/Staple Capacity: Main Tray (A): 4,000 Sheets; Sub Tray (B): 200 Sheets/65 Sheets (up to 24 lb. Bond [90gsm])

Paper Size: 5.5" x 8.5" - 12" x 18"

Paper Weight: 14 lb. Bond = 166 lb. Index (52 - 300gsm)

Edge Staple Position: 3 Positions: Top Left, Bottom Left, Center Bind

Optional Punch: PH-7A 2/3 Hole Punch Unit, Supports 5.5" x 8.5" - 12" x 18"; 14 lb. Bond -166 lb. Index (52 -300gsm)

Dimensions: 29" W x 26" D x 42" H

Optional Booklet Folder/Trifold Unit BF-730; (DF-7140) Booklet Folder supports 8.5" x 11", 8.5" x 14", 11" x 17"; Fold Booklet Staple: 16 lb. - 24 lb. Bond (60 - 90gsm) 20 sheets; 25 lb. - 28 lb. Bond (91 - 105gsm) 13 sheets; Higher than 28 lb. Bond (Higher than 105gsm) 1 sheet; Fold booklet no staple: 16 lb. — 24 lb. Bond (60 — 90gsm) 5 sheets; 25 lb. Bond - 72 lb. Index (91 - 120gsm) 3 sheets; 32 lb. Bond -110 lb. Cover (121 - 256gsm) 1 sheet; Trifold supports 8.5" x 11" only: 16 lb. — 24 lb. Bond (60 — 90gsm) 5 sheefs; 25 lb. Bond - 72 lb. Index (91 - 120gsm) 3 sheets; 16 lb. - 28 lb. Bond (60 - 105gsm) 1 sheet

Optional Multi-Bin Malibox MT-730(B): (DF-7140) 7 Trays; Supports: 16 lb. Bond - 90 lb. Index (60 - 163gsm); Stack Capacity per bin: 100 Sheets: 5.5" x 8.5", 8.5"x 11"; 50 Sheets: ADDITIONAL OPTIONS

AK-7110 Bridge Unit Affachment Kit, JS 7100 Inner Job Separator, HD-16 Large Capacity HDD (ITB), Banner Guide 10, Internet Fax Kit (A), Card Authentication Kit (B), Dual NIC (IB-50), Extended Range Wireless LAN NIC (IB 51), Thin Print option (UG-33), Printer Emulation option (UG-34), DT-730(B) Document Tray, Scan Extension Kit (A) for Text Searchable PDF; MS Office File, Keyboard Holder 10, Numeric Keypad (NK-7130), Cabinet Stand

- 1 Requires PF-7140
- 2 Only 1 Document Processor can be installed 3 Only 1 Output Option can be installed
- « Requires Bridge Unit Attachment Kit (AK-7110)

Specifications and design are subject to change without notice. For the latest on connectivity visit kyoceradocumentsolutions.us. TASKalfa, PRESCRIBE, Kyocera Net Manager, Kyocera Net Viewer, Kyocera Device Manager, PDF Direct Print, Command Center RX, and KX Driver are trademarks of The Kyocera Companies. Mac OS and AirPrint are trademarks of Apple, Inc. Mopria is a trademark of Mopria Alliance, Inc. Windows is a trademark of Microsoft, Inc. All other trademarks are the property of their respective owners.











Kyocera Document Solutions Partner

KYOCERA Document Solutions America 225 Sand Road, PO Box 40008 Fairfield, New Jersey 07004-0008, USA Tel: 973-808-8444




kyoceradocumentsolutions.us



Your Workplace Evolution

These monochrome additions to the Kyocera Evolution Series are designed to keep your costs low and your efficiency at its highest. With the latest security compliance, rapid print and scan speeds, and a more engaging user experience, they will optimize your workflows and maximize productivity. Join the Evolution today and keep your business at the cutting edge!

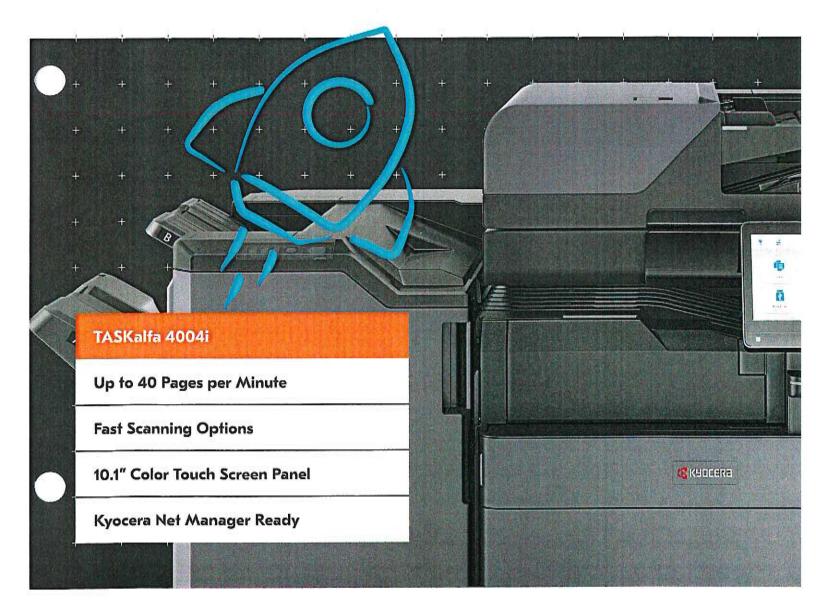

TASKalfa 4004i

BASIC SPECIFICATIONS

Configuration: BW MFP - Print/Scan/Copy/Optional Fax Speed: Letter: 40 ppm, Legal: 24 ppm, Ledger: 20 ppm

Warm Up Time: 17 seconds or less (power on) First Page Out:

Copy: 4.5 seconds

Print: 5.1 seconds

Display: 10.1" Color Touch Screen Confrol Panel Memory/Hard Disk Drive: 4GB RAM/32GB 55D/ 320GB HDD Standard, 1TB HDD (option)

Duplex: Standard Stackless Duplex supports Statement (5.5" x 8.5") to Ledger (12" x 18"), 16 lb. Bond - 142 lb. Index (60 - 256asm)

Standard Output Tray: Statement - 12" x 18"/500-sheets; up to 12" x 48" Banner (single sheet)

Electrical Requirements: 120V, 60Hz, 12A; 220-240V, 50/60Hz, 7.2A

Typical Electricity Consumption (TEC): 120V: .49 kWh/week; 220V: .31 kWh/week

Dimensions: 23.7" W x 26.1" D x 31.1" H

Weight: 182 lbs

Maximum Monthly Dufy Cycle: 175,000 Pages per Month

PAPER SUPPLY

Standard Paper Sources: Dual 500-sheet Trays, 150-sheet MPT, Auto Selection/Switching Standard Paper Size: Tray 1 — 5.5" x 8.5" — 8.5" x 14" (statement to legal)

Paper Capacity: Standard 1,150-sheets; Maximum 7,150-sheets

Tray 2 - 5.5" x 8.5" - 12" x 18", Custom Size MPT: 5.5" x 8.5" - 12" x 18" (multiple); to 12" x 48" Banner

Optional Paper Sources:

PF-7140 Dual 500-sheet Tray Option - 5.5" x 8.5" - 12" x 18" PF-7150 Dual 1,500-sheet Tray Option - 8.5" x 11" PF-7120 3,000-sheef Large Capacity Tray Option - 8.5" x 11"

Paper Weight:

Trays/MPT: 14 lb. Bond - 166 lb. Index (52 - 300gsm) Input Materials: Standard/Optional Trays: Plain, Bond, Recycled, Preprinted, Vellum, Color, Pre-Punched, Thick, Thin, High Quality, Letterhead, Envelope, Custom; MPT: Plain, Bond, Recycled, Preprinted, Vellum, Color, Pre-Punched, Thick, Thin, High Quality, Transparency (OHP), Coaled, Index Tab, Label, Letterhead, Envelope, Custom

SECURITY SPECIFICATIONS

Local Authentication, Network Authentication, Encryption Communication (IPsec, HTTPS, TLS 1.3, LDAPS, SMTP/POP/ FTPS over TLS, SNMPv3), TPM chipset (Trusted Platform Module), S/MIME, SCEP (auto certificate issuance/renewal), OCSP/CRL (certificate validation), Secure Boot (firmware authenticity verification), Run Time Integrity Check, Data Security Kit 10 enhances IPsec communication (support for FIPS 140-2), HDD and Memory Overwrite (7x) Mode and HDD Data Encryption (256 bit), Common Criteria (ISO/IEC-15408/ EAL2), IEEE 2600.2

PRINT SPECIFICATION

Standard Controller: ARM Cortex-A53/1.6GHz PDLs/Emulations: PRESCRIBE, PCL6 (PCL-XL/PCL-5e), KPDL3 (PS3), XPS, OPEN XPS, PDF; Optional (UG 34): IBM ProPrinter, Line Printer, LQ-850 Print Resolution: Up to 4800 x 1200 dpi Fonts: KPDL3, PCL6, Bitmap OS Compatibility: Windows: 8.1/10/Server 2012/ Server 2012 R2/Server 2016/Server 2019; Mac OS X v10.0 or later; Chrome OS Mobile Printing: Apple AirPrint®, Mopris®, KYOCERA Mobile Print, KYOCERA MyPenel Interfaces: Standard: 1000 Base-T/100-Base-Tx/10BASE-T (IPv6, IPv4, IPsec), 802.3az ready, High-Speed USB 3.0, 4 USB 2.0 Host Interfaces, 2 Expansion Slots,

IEEE 802.11b/g/n Wireless LAN (supports up to 98.5 feet); Optional: IEEE 802.11a/b/g/n/ac (IB-37 for 2.4/5GHz), 10/100/1000BaseTX (IB-50 for Dual NIC); IEEE 802.11b/g/n (IB-51 for Wireless LAN Interface (supports up to 328.1 feet) Network Print and Supported Protocols: HTTPS, FTPS, SNMP v1/v2c/v3, Raw Port (Port 9100) TCP/IP, IPv4, IPv6, DHCP LPR, DNS, WSD Scan/Print Drivers: KX Driver, PCL Mini Driver, KPDL Mini Driver,

Network Fax Driver, TWAIN Driver, WIA Driver, Status Monitor, Common Profile, Output to PDF, Security Watermark, Super Resolution, Color Optimizer, MAC Driver, Chrome Print Driver, Linux Driver, KX Driver with Distributed Printing, Windows Inbox Driver, SANE Driver Utilities: KYOCERA Net Viewer, KYOCERA Net Device Manager, Quick Setup, KX PRESCRIBE Macro Generator, ID Register, Software Management Service, Upgrade Studio, Web Package Maker, Removal Tool, Wi-Fi Setup Tool, PDF Direct Print, Command Center RX; Kyocera Net Manager (option)

SCAN SPECIFICATION

Scan Type: Color and Black & White Scanner Scan Resolution: 600/400/300/200 dpi, 200 x 100 dpi, 200 x 400 dpi File Formats: TIFF, JPEG, XPS, OpenXPS, PDF/A-2.0 (MMR/JPG Compression/High Compression PDF); Option: Scan Extension Kit Text Searchable PDF; MS Office File Connectivity/Supported Protocols: 10 BASE-T/100 BASE-TX/1000 BASE-T (IPv6, IPv4, IPSec) TCP/IP, Hi-Speed USB 3.0

Scanning Functions: Scan-to-Folder (SMBv3), Scan-to-Email, Scan-to-FTPS over TLS, Scan-to-USB, PDF Digital Signatures, WSD Scan, DSM/SANE Scan, TWAIN Scan, Specified Color Removal, Border Erase, Preview

Original Size: Up to 11" x 17" (Glass) Drivers: TWAIN/WIA/DSM-SANE Driver/WSD Scan

OPTIONAL DOCUMENT PROCESSORS

Acceptable Originals: 5.5" x 8.5" — 11" x 17"

DP-7150: Reverse Auto Document Processor/140-sheets Speed: Simplex: 80 ipm; Duplex: 48 ipm (BW/Color) Weight: Simplex: 13 lb. Bond - 90 lb. Index (35 - 160gsm) Duplex: 16 lb. - 32 lb. Bond (50 - 120gsm)

DP-7160 (with multi-feed detection):

Dual Scan Document Processor/320-sheets Speed: Simplex: 137 ipm; Duplex: 274 ipm (BW/Color) Weights: Simplex: 13 lb. Bond - 120 lb. Index (35 - 220gsm) Duplex: 16 lb. - 120 lb. Index (50 - 220gsm)

DP-7170 (with multi-feed and staple detection): Dual Scan Document Processor/320-sheets

Speed: Simplex: 137 ipm; Duplex: 274 ipm (BW/Color) Weights: Simplex: 13 lb. Bond - 120 lb. Index (35 - 220gsm) Duplex: 16 lb. - 120 lb. Index (50 - 220gsm)

COPY SPECIFICATIONS

Copy Resolution: 600 x 600 dpi Image Mode: Text, Photo, Text/Photo, Graphic/Map Continuous Copy: 1 — 9,999 Additional Features: Auto Magnification, Auto Paper Select, Combine Copy, Mirror Image, Rotate Copy, Border Erase, Split Copy, Margin Shift, Page Number, Form Overlay, Blank Page Skip, Specified Color Removal, Proof Copy, Preview, ID Card Copy Job Management: 1,000 User Codes, Job Build, Shortcut Keys, Repeat Copy Magnification/Zoom: Full Size, 4 Reduction, 4 Enlargement Preset Ratios, 25 - 400% in 1% Step Increments

Document Box: Custom/Job/USB Drive Box, Fax Box

OPTIONAL FAX SPECIFICATIONS

Fax Type: Fax System 12 (option) Type/Dafa Compression: G3 Fax/MMR, MR, MH, JBIG Transmission Speed/Modem Speed: Less than 3 seconds/33.6 Kbps Fax Memory: Standard 170 MB Driver: Network Fax Drive Fax Functions: Network Fax, Duplex Transmission and Reception, Encrypted Transmission and Reception, Polling Transmission and Reception, Broadcast, Fax Server Integration, Fax Dedicated Paper Feed Tray, Fax Forwarding to email or file

SOLUTIONS AND SERVICES

Remote Management

Kyocera Fleet Services ready! A highly secure cloud-based monitoring solution that offers real-time visibility into your fleet. Optimize device uptime and be notified when to replenish supplies. Streamline billing with seamless 3rd party application integration, allowing you to focus solely on your business.

Printing Software Cost Control & Security Cloud & Mobile

Printer Management

Content Services Scan & Connect

Intelligent Process Automation **Enterprise Content Management**

IT Solutions

Technology Solutions Including solutions for Cloud and Data Centers Network Infrastructure Cybersecurity Solutions Collaboration Solutions

Consulting Services Including IT Health Check CIO as a Service Healthcare Compliance Backup and Recovery Planning

Professional Services Including Design and Architecture Project Implementation Project Management

Managed Services Including Help Desk Services Retainer Services and On-site Support

Output & Finishing Options₃

OPTIONAL 250 SHEET INNER SHIFT TRAY IS-7110

Stack Capacity: 250-sheets Paper Size: 8.5" x 11" — 11" x 17" Paper Weight: 14 lb, Bond — 166 lb, Index (52 — 300gsm)

OPTIONAL 500 SHEET INTERNAL FINISHER DF-71004

Stack/Staple Capacity: 500-sheets/50-sheets
Paper Size: 5.5" x 8.5" — 12" x 18"
Paper Weight: 14 lb. Bond — 166 lb. Index (52 — 300gsm)
Edge Staple Position: 3 Positions: Front: 1 Staple,
Edge: 1 Staple, Face: 2 Staples
Optional Punch: PH-7100 2/3 Hole Punch Unit,
supports 5.5" x 8.5" — 12" x 18"; 14 lb. Bond — 166 lb. Index
Dimensions: 19.4" W x 21" D x 6.9" H

OPTIONAL 1,000 SHEET FINISHER DF-7120.

Stack/Staple Capacity: Main Tray: 1,000-sheets/50-sheets (up to 24 lb. Bond [90gsm]) Paper Size: 5.5" x 8.5" — 12" x 18" Paper Weight: 4lb. Bond — 166 lb. Index (52 — 300gsm) Edge Staple Position: 3 Positions: Top Left, Bottom Left, Center Bind

Optional Punch: PH-7A 2/3 Hole Punch Unit, supports 5.5" x 8.5" — 12" x 18"; 14 lb. Bond — 166 lb. Index Dimensions: 21.6" W x 24.4" D x 41.3" H

OPTIONAL 4,000 SHEET FINISHER DF-71404

Stack/Staple Capacity: Main Tray (A): 4,000-sheets; Sub Tray (B): 200-sheets/65-sheets (up to 24 lb. Bond [90gsm])

Paper Size: 5.5" x 8.5" - 12" x 18"

Paper Weight: 14 lb. Bond – 166 lb. Index (52 – 300gsm) Edge Staple Position: 3 Positions: Top Left, Bottom Left, Center Bind

Optional Punch: PH-7A 2/3 Hole Punch Unil, supports 5.5" x 8.5" — 12" x 18"; 14 lb. Bond — 166 lb. Index Dimensions: 29" W x 26" D x 42" H

Optional Booklet Folder/Trifold Unit BF-730: (DF-7140)
Booklet Folder: supports 8.5" x 11", 8.5" x 14", 11" x 17"
Fold Booklet (staple): 16 lb. — 24 lb. Bond (60 — 90gsm)
20-sheels; 25 lb. — 28 lb. Bond (91 — 105gsm) 13-sheels;
Higher than 28 lb. Bond (Higher than 105 gsm) 1-sheel
Fold Booklet (no staple): 16 lb. — 24 lb. Bond (60 — 90gsm)
5-sheets; 25 lb. Bond — 72 lb. Index (91 — 120gsm) 3-sheets;
32 lb. Bond — 110 lb. Cover (121 — 256gsm) 1-sheet
Trifold: supports 8.5" x 11" only: 16 lb. — 24 lb. Bond
(60 — 90gsm) 5-sheets; 25 lb. Bond — 72 lb. Index
(91 — 120gsm) 3-sheets

Optional Multi-Bln Mallbox MT-730(B): (DF-7140) 7 Trays; supports: 16 ib. Bond — 90 lb. Index (60 — 163gsm); Stack Capacity per bin: 100-sheets: 5.5" x 8.5", 8.5" x 11"; 50-sheets: 8.5" x 14", 11" x 17"

OPTIONAL 4,000 SHEET FINISHER DF-71504

Stack/Staple Capacity: Main Tray (A): 4,000-sheets; Sub Tray (B): 200-sheets/100-sheets (up to 20lb. Bond [80gsm])

Paper Size: 5.5" x 8.5" - 12" x 18"

Paper Weight: 14 lb. Bond — 166 lb. Index (52 — 300gsm) Edge Staple Position: 3 Positions: Top Left, Bottom Left, Center Bind

Optional Punch: PH-7A 2/3 Hole Punch Unit, supports 5.5" x 8.5" — 12" x 18"; 14 lb. Bond — 166 lb. Index Dimensions: 29" W x 26" D x 42" H

Optional Booklet Folder/Trifold Unit BF-9100: (DF-7150)
Booklet Folder: supports 8.5" x 11", 8.5" x 14", 11" x 17"
Fold Booklet (staple): 14 lb. — 24 lb. Bond (52 — 90gsm)
20-sheets; 25 lb. — 28 lb. Bond (91 — 105gsm) 13-sheets;
Higher than 28 lb. Bond (Higher than 105 gsm) 1-sheef
Fold Booklet (no staple): 14 lb. — 24 lb. Bond (52 — 90gsm)
5-sheets; 24 lb. Bond — 28 lb. Index (91 — 105gsm) 3-sheets;
28 lb. Bond — 140 lb. Index (106 — 256gsm) 1-sheet
Trifold: supports 8.5" x 11" only: 14 lb. — 24 lb. Bond
(52 — 90gsm) 5-sheets; 25 lb. Bond — 28 lb. Index
(91 — 105gsm) 3-sheets

ADDITIONAL OPTIONS

AK-7110 Bridge Unit Attachment Kit, IS-7100 Job Separator, HD-16 Large Capacity HDD (1TB), Banner Guide 10, Internet Fax Kit (A), Card Authentication Kit (B), Data Security Kit 10. Dual Nic (18-50), Extended Range Wireless LAN Nic (18-51), Thin Print option (UG-33), Printer Emulation option (UG-34), DT-730(B) Document Tray, Scan Extension Kit (A) for Taxt Searchable PDF; MS Office File, Keyboard Holder 10, Numeric Keypad (NK-7130), Cabinet Stand

, Requires PF-7140

- 2 Only 1 Document Processor can be installed
- 3 Only 1 Output Option can be installed 4 Requires Bridge Unit Attachment Kil (AK-7110)

Specifications and design are subject to change without notice. For the latest on connectivity visit kyoceradocumentsolutions.us. TASKalfa, PRESCRIBE, Kyocera Net Manager, Kyocera Net Viewer, Kyocera Device Manager, PDF Direct Print, Command Center RX, and KX Driver are trademarks of The Kyocera Companies. Mac OS and AirPrint are trademarks of Apple, Inc. Mopria is a trademark of Mopria Alliance, Inc. Windows is a trademark of Microsoft, Inc. All other trademarks are the property of their respective owners.









Kyocera Document Solutions Partner

KYOCERA Document Solutions America 225 Sand Road, PO Box 40008 Fairfield, New Jersey 07004-0008, USA Tel: 973-808-8444




kyoceradocumentsolutions.us



Your Workplace Evolution, in Color

The Kyocera Evolution Series continues to grow with the addition of a new range of high-impact color A3 MFPs. These robust devices boast industry-leading technology and security, along with outstanding print and scan speeds, to ensure impeccable quality output every single time. Join the Evolution today and add a new dimension to your business.

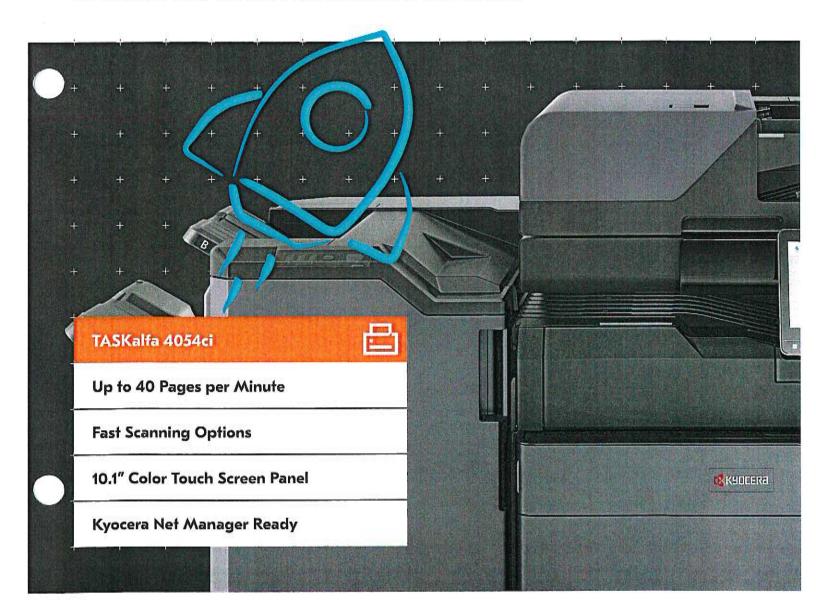

TASKalfa 4054ci

BASIC SPECIFICATIONS

Configuration: Color MFP - Print/Scan/Copy/Optional Fax Speed: Letter: 40 ppm, Legal: 24 ppm, Ledger: 20 ppm (print only)

Warm Up Time: 17 seconds or less (power on) First Page Out:

Copy: 4.5 seconds BW, 5.9 seconds Color
Print: 5.1 seconds BW, 6.5 seconds Color
Display: 10.1" Color Touch Screen Control Panel
Memory/Hard Disk Driver: 4GB RAM/32GB SSD/
320GB HDD Standard, 1TB HDD (option)
Duplex: Standard Stackless Duplex supports Statement
(5.5" x 8.5") to Ledger (12" x 18"), 16 lb. Bond - 142 lb. Index
(60 - 256gsm)
Standard Output Tray: Statement - 12" x 18"/500-sheets;
up to 12" x 48" Banner (single sheet)
Electrical Requirements: 120V, 60Hz, 12A;
220-240V, 50/60Hz, 7.2A
Typical Electricity Consumption (TEC): 120V: .52 kWh/week;
220V: .51 kWh/week

Maximum Monthly Duty Cycle: 175,000 Pages per Month

Dimensions: 23.7" W x 26.1" D x 31.1" H

DADED CHIDDLY

Weight: 209.4 lbs

Standard Paper Sources: Dual 500-sheet Trays, 150-sheet MPT, Auto Selection/Switching Standard Paper Size: Tray 1 – 5.5" × 8.5" – 8.5" × 14" (statement to legal) Tray 2 – 5.5" × 8.5" – 12" × 18", Custom Size MPT: 5.5" × 8.5" – 12" × 18" (multiple); to 12" × 48" Banner

Paper Capacity: Standard 1,150-sheets; Maximum 7,150-sheets

Optional Paper Sources

PF-7140 Dual 500-sheet Tray Option - 5.5" x 8.5" — 12" x 18" PF-7150 Dual 1,500-sheet Tray Option - 8.5" x 11" PF-7120 3,000-sheet Large Capacity Tray Option - 8.5" x 11"

Paper Weight:

(single)

Trays/MPT: 14 lb. Bond — 166 lb. Index (52 — 300gsm)
Input Materials: Standard/Optional Trays: Plain, Bond,
Recycled, Preprinted, Vellum, Color, Pre-Punched, Thick, Thin,
High Quality, Letterhead, Envelope, Custom; MPT: Plain, Bond,
Recycled, Preprinted, Vellum, Color, Pre-Punched, Thick, Thin,
High Quality, Transparency (OHP), Coated, Index Tab, Label,
Letterhead, Envelope, Custom

SECURITY SPECIFICATIONS

Local Authentication, Network Authentication, Encryption Communication (IPsec, HTTPS, TLS 1.3, SMTP/POP/FTPS over TLS, SMMP43), TPM chipset (Trusted Platform Module), S/MIME, SCEP (auto certificate Issuance/renewal), OCSP/CRL (certificate validation), Secure Boot (firmware authenticity verification), Run Time Integrity Check, Data Security Kit 10 enhances IPsec communication (support for FIPS 140-2), HDD and Memory Overwrite (7x) Mode and HDD Data Encryption (256 bit), Common Criteria (ISO/IEC-15408/EAL2), IEEE 2600.2

PRINT SPECIFICATION

Standard Controller: ARM Cortex-A53/1.6GHz
PDLs/Emulations: PRESCRIBE, PCL6 (PCL-XL/PCL-5e), KPDL3 (PS3), XPS, OPEN XPS, PDF; Optional (UG 34): IBM ProPrinter, Line Printer, LG-850
Print Resolution: Up to 4800 x 1200 dpi
Fonts: KPDL3, PCL6, Bilmap
OS Compatibility: Windows: 8.1/10/Server 2012/
Server 2012 R2/Server 2016/Server 2019; Mac OS X v10.0 or later; Chrome OS
Mobile Printing: Apple AlrPrint®, Mopria®, KYOCERA Mobile Print, KYOCERA MyPanel
Interfaces: Standard: 1000 Base-T/100-Base-Tx/10BASE-T (IPV6, IPV4, IPsec), 802.3az ready, High-Speed USB 3.0,

4 USB 2.0 Host Interfaces, 2 Expansion Slots, IEEE 802.11b/g/n Wireless LAN (supports up to 98.5 feet); Optional: IEEE 802.11a/b/g/n/ac (IB-37 for 2.4/5GHz), 10/100/1000BaseTX (IB-50 for Dual NIC); IEEE 802.11b/g/n (IB-51 for Wireless LAN Interface (supports up to 328.1 feet) Network Print and Supported Protocols: HTTPS, FTPS, SNMP v1/v2c/v3, Raw Port (Port 9100) TCP/IP, IPv4, IPv6, DHCP LPR, DNS, WSD Scan/Print Drivers: KX Driver, PCL Mini Driver, KPDL Mini Driver, Network Fax Driver, TWAIN Driver, WIA Driver, Status Monitor, Common Profile, Output to PDF, Security Watermark, Super Resolution, Color Optimizer, MAC Driver, Chrome Print Driver, Linux Driver, KX Driver with Distributed Printing, Windows Inbox Driver, SANE Driver Utilities: KYOCERA Net Viewer, KYOCERA Net Device Manager, Quick Setup, KX PRESCRIBE Macro Generator,

ID Register, Software Management Service, Upgrade Studio,

Web Package Maker, Removal Tool, Wi-Fi Selup Tool,

PDF Direct Print, Command Center RX;

SCAN SPECIFICATION Scan Type: Color and Black & White Scanner

Kyocera Net Manager (option)

Scan Resolution: 600/400/300/200 dpi, 200 x 100 dpi, 200 x 400 dpi, 200 x 400 dpi. File Formals: TIFF, JPEG, XPS, OpenXPS, PDF/A-2.0 (MMR/JPG Compression/High Compression PDF); Option: Scan Extension Kil Text Searchable PDF; MS Office File Connectivity/Supported Protocols: 10 BASE-T/100 BASE-TX/1000 BASE-T (IPv6, IPv4, IPSec) TCP/IP, Hi-Speed USB 3.0 Scanning Functions: Scan-to-Folder (SMBv3), Scan-to-Email, Scan-to-FTPS over TLS, Scan-to-USB, WSD Scan, DSM/SANE Scan, TWAIN Scan, Specified Color Removal, Border Erase, Preview, PDF Digital Signatures Original Size: Up to 11" x 17" (Glass) Drivers: TWAIN/WIA/DSM-SANE Driver/WSD Scan

OPTIONAL DOCUMENT PROCESSORS

Acceptable Originals: 5.5" x 8.5" - 11" x 17"

DP-7150: Reverse Auto Document Processor/140-sheets Speed: Simplex: 80 ipm; Duplex: 48 ipm (BW/Color) Weight: Simplex: 13 lb. Bond – 90 lb. Index (35 – 160gsm) Duplex: 16 lb. – 32 lb. Bond (50 – 120gsm)

DP-7160 (with multi-feed detection):

Dual Scan Document Processor/320-sheets Speed: Simplex: 137 ipm; Duplex: 274 ipm (BW/Color) Weights: Simplex: 13 lb. Bond — 120 lb. Index (35 — 220gsm) Duplex: 16 lb. — 120 lb. Index (50 — 220gsm)

DP-7170 (with multi-feed and staple detection):
Dual Scan Document Processor/320-sheets
Speed: Simplex: 137 ipm; Duplex: 274 ipm (BW/Color)
Weights: Simplex: 13 lb. Bond — 120 lb. Index (35 — 220gsm)
Duplex: 16 lb. — 120 lb. Index (50 — 220gsm)

COPY SPECIFICATIONS Copy Resolution: 600 x 600 dpi

Image Mode: Text, Photo, Text/Photo, Graphic/Map
Continuous Copys 1 — 9,999
Additional Features: Auto Magnification, Auto Paper Select,
Combine Copy, Mirror Image, Rotate Copy, Border Erase,
Split Copy, Margin Shitt, Page Number, Form Overlay,
Blank Page Skip, Specified Color Removal, Proof Copy,
Preview, ID Card Copy
Job Management: 1,000 User Codes, Job Build, Shortcut Keys,
Repeat Copy
Magnification/Zooms Full Size, 4 Reduction, 4 Enlargement
Preset Relios, 25 — 400% in 1% Step Increments
Document Box: Custom/Job/USB Drive Box, Fax Box
(w/option)

OPTIONAL FAX SPECIFICATIONS

Fax Type: Fax System 12 (option)
Type/Data Compression: G3 Fax/MMR, MR, MH, JBIG
Transmission Speed/Modern Speed: Less than
3 seconds/33.6 Kbps
Fax Memory: Standard 170 MB
Driver: Network Fax Driver
Fax Functions: Network Fax, Duplex Transmission and
Reception, Encrypted Transmission and Reception,
Polling Transmission and Reception,
Fax Server Integration, Fax Dedicated Paper Feed Tray,
Fax Forwarding to email or file

SOLUTIONS AND SERVICES

Remote Management

Kyocera Fleet Services ready! A highly secure cloud-based monitoring solution that offers real-time visibility into your fleet. Optimize device uptime and be notified when to replenish supplies. Streamline billing with seamless 3rd party application integration, allowing you to focus solely on your business.

Printing Software Cost Control & Security Cloud & Mobile

Cloud & Mobile Printer Management

Content Services Scan & Connect Intelligent Process Automation

Intelligent Process Automation Enterprise Content Management IT Solutions

Technology Solutions Including solutions for Cloud and Dala Centers Network Infrastructure Cybersecurity Solutions Collaboration Solutions

Consulting Services Including IT Health Check CIO as a Service Healthcare Compliance Backup and Recovery Planning

Professional Services Including Design and Architecture Project Implementation Project Management

Managed Services Including Help Desk Services Retainer Services and On-site Support

Output & Finishing Options₃

OPTIONAL 250 SHEET INNER SHIFT TRAY IS-7110

Stack Capacity: 250-sheets

Paper Size: 8.5" x 11" - 11" x 17"

Paper Weight: 14 lb. Bond - 166 lb. Index (52 - 300gsm)

OPTIONAL 500 SHEET INTERNAL FINISHER DF-71004

Stack/Staple Capacity: 500-sheets/50-sheets Paper Size: 5.5" x 8.5" - 12" x 18" Paper Weight: 14 lb. Bond - 166 lb. Index (52 - 300gsm) Edge Staple Position: 3 Positions: Front: 1 Staple, Edge: 1 Staple, Face: 2 Staples Optional Punch: PH-7100 2/3 Hole Punch Unit, supports 5.5" x 8.5" - 12" x 18"; 14 lb. Bond - 166 lb. Index Dimensions: 19.4" W x 21" D x 6.9" H

OPTIONAL 1,000 SHEET FINISHER DF-7120

Stack/Staple Capacity: Main Tray: 1,000-sheets/50-sheets (up to 24 lb. Bond [90gsm])

Paper Size: 5.5" x 8.5" - 12" x 18"

Paper Weight: 14 lb. Bond - 166 lb. Index (52 - 300gsm) Edge Staple Position: 3 Positions: Top Left, Bottom Left,

Optional Punch: PH-7A 2/3 Hole Punch Unit, supports 5.5" x 8.5" - 12" x 18"; 14 lb. Bond - 166 lb. Index

(52 - 300gsm) Dimensions: 21.6" W x 24.4" D x 41.3" H

OPTIONAL 4,000 SHEET FINISHER DF-7140.

Stack/Staple Capacity: Main Tray (A): 4,000-sheets; Sub Tray (B): 200-sheets/65-sheets (up to 24 lb. Bond [90gsm])

Paper Size: 5.5" x 8.5" - 12" x 18"

Paper Weight: 14 lb. Bond - 166 lb. Index (52 - 300gsm) Edge Staple Position: 3 Positions: Top Left, Bottom Left, Center Bind

Optional Punch: PH-7A 2/3 Hole Punch Unit, Supports 5.5" x 8.5" - 12" x 18"; 14 lb. Bond - 166 lb. Index Dimensions: 29" W x 26" D x 42" H

Optional Booklet Folder/Trifold Unit BF-730: (DF-7140) Booklet Folder: supports 8.5" x 11", 8.5" x 14", 11" x 17" Fold Booklet (staple): 16 lb. — 24 lb. Bond (60 — 90gsm) 20-sheets; 25 lb. - 28 lb. Bond (91 - 105asm) 13-sheets; Higher than 28 lb. Bond (Higher than 105 gsm) 1-sheet Fold Booklet (no staple): 16 lb. - 24 lb. Bond (60 - 90gsm) 5-sheets; 25 lb. Band - 72 lb. Index (91 - 120gsm) 3-sheets; 32 lb. Bond - 110 lb. Cover (121 - 256gsm) 1-sheet Trifold: supports 8.5" x 11" only: 16 lb. — 24 lb. Bond (60 - 90gsm) 5-sheets; 25 lb. Bond - 72 lb. Index (91 - 120gsm) 3-sheets

Optional Multi-Bin Mailbox MT-730(B): (DF-7140) 7 Trays; supports: 16 lb. Bond — 90 lb. Index (60 — 163gsm); Stack Capacity per bin: 100-sheets: 5.5" x 8.5", 8.5" x 11"; 50-sheets: 8.5" x 14", 11" x 17"

OPTIONAL 4,000 SHEET FINISHER DF-71504

Stack/Staple Capacity: Main Tray (A): 4,000-sheets; Sub Tray (B): 200-sheefs/100-sheets (up to 20 lb. Bond (80asm1)

Paper Size: 5.5" x 8.5" -- 12" x 18"

Paper Weight: 14 lb. Bond - 166 lb. Index (52 - 300gsm) Edge Staple Position: 3 Positions: Top Left, Bottom Left, Center Bind

Optional Punch: PH-7A 2/3 Hole Punch Unit. supports 5.5" x 8.5" - 12" x 18"; 14 lb. Bond - 166 lb. Index (52 - 300 asm)

Dimensions: 29" W x 26" D x 42" H

Optional Booklet Folder/Trifold Unit BF-9100: (DF-7150) Booklet Folder: supports 8.5" x 11", 8.5" x 14", 11" x 17" Fold Booklet (steple): 14 lb. - 24 lb. Bond (52 - 90gsm) 20-sheets; 25 lb. - 28 lb. Bond (91 - 105gsm) 13-sheets; Higher than 28 lb. Bond (Higher than 105gsm) 1-sheet Fold Booklet (no staple): 14 lb. - 24 lb. Bond (52 - 90gsm) 5-sheets: 24 lb. Bond - 28 lb. Index (91 - 105asm) 3-sheets: 28 lb. Bond - 140 lb. Index (106 - 256gsm) 1-sheet Trifold: supports 8.5" x 11" only: 14 lb. - 24 lb. Bond (52 - 90gsm) 5-sheets; 25 lb. Bond - 28 lb. Index (91 - 105gsm) 3-sheets

ADDITIONAL OPTIONS

AK-7110 Bridge Unit Attachment Kit, IS-7100 Job Separator, HD-16 Large Capacity HDD (1TB), Banner Guide 10, Internet Fax Kit (A), Card Authentication Kit (B), Data Security Kit 10. Dual NIC (IB-50), Extended Range Wireless LAN NIC (IB-51), Thin Print option (UG-33), Printer Emulation option (UG-34), DT-730(B) Document Tray, Scan Extension Kit (A) for Text Searchable PDF; MS Office File, Keyboard Holder 10, Numeric Keypad (NK-7130), Cabinet Stand, EFI Printing System 17 - Fiery Confroller

- Requires PF-7140
- 3 Only 1 Document Processor can be installed
- Only 1 Output Option can be installed
- 4 Requires Bridge Unit Attachment Kit (AK-7110)

Specifications and design are subject to change without notice. For the latest on connectivity visit kyoceradocumentsolutions.us. TASKalfa, PRESCRIBE, Kyocera Net Manager, Kyocera Net Viewer, Kyocera Device Manager, PDF Direct Print, Command Center RX, and KX Driver are trademarks of The Kyocera Companies. Mac OS and AirPrint are trademarks of Apple, Inc. Mopria is a trademark of Mopria Alliance, Inc. Windows is a trademark of Microsoft, Inc. All other trademarks are the property of their respective owners.









Kyocera Document Solutions Partner

KYOCERA Document Solutions America 225 Sand Road, PO Box 40008 Fairfield, New Jersey 07004-0008, USA Tel: 973-808-8444




kyoceradocumentsolutions.us



Your Workplace Evolution

These monochrome additions to the Kyocera Evolution Series are designed to keep your costs low and your efficiency at its highest. With the latest security compliance, rapid print and scan speeds, and a more engaging user experience, they will optimize your workflows and maximize productivity. Join the Evolution today and keep your business at the cutting edge!

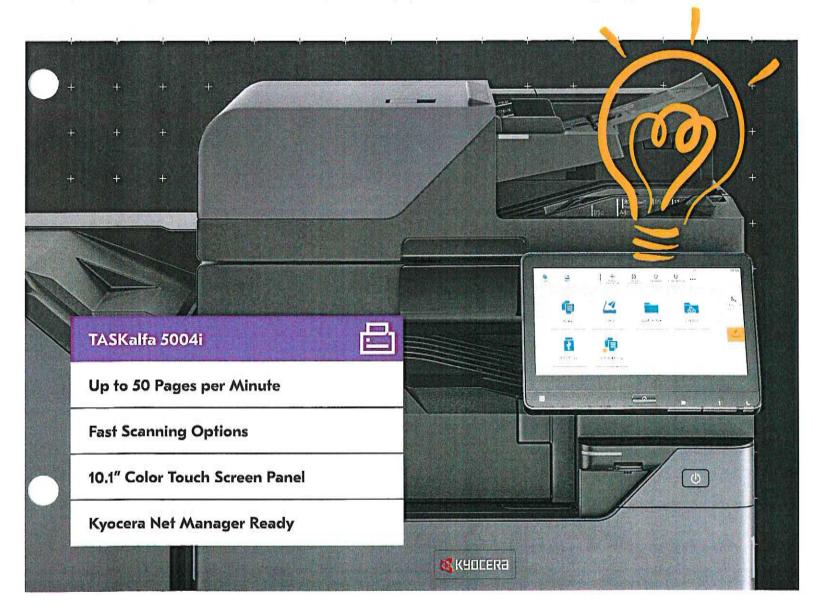

TASKalfa 5004i

BASIC SPECIFICATIONS

Configuration: BW MFP - Print/Scan/Copy/Optional Fax Speed: Letter: 50 ppm, Legal: 30 ppm, Ledger: 25 ppm (print only)

Warm Up Time: 17 seconds or less (power on)

First Page Out:

Copy: 3.7 seconds Print: 4.3 seconds

Display: 10.1" Color Touch Screen Control Panel Memory/Hard Disk Drive: 4GB RAM/32GB SSD/ 320GB HDD Standard, 1TB HDD (option)

Duplex: Standard Stackless Duplex supports Statement (5.5" x 8.5") to Ledger (12" x 18"), 16 lb. Bond - 142 lb. Index (60 - 256gsm)

Standard Output Tray: Statement - 12" x 18"/500-sheets; up to 12" x 48" Banner (single sheet)

Electrical Requirements: 120V, 60Hz, 12A; 220-240V, 50/60Hz, 7.2A

Typical Electricity Consumption (TEC): 120V: .63 kWh/week; 220V: .60 kWh/week

Dimensions: 23.7" W x 26.1" D x 31.1" H Welght: 182 lbs

Maximum Monthly Dufy Cycle: 225,000 Pages per Month

PAPER SUPPLY

Paper Capacity: Standard 1,150-sheets; Maximum 7,150-sheets Standard Paper Sources: Dual 500-sheet Trays, 150-sheet MPT, Auto Selection/Switching Standard Paper Size: Tray 1 -5.5° x 8.5° -8.5° x 14" (statement to legal) Tray 2 -5.5° x 8.5° -12° x 18", Custom Size MPT: 5.5" x 8.5" — 12" x 18" (multiple); to 12" x 48" Banner

Optional Paper Sources:

PF-7140 Dual 500-sheet Tray Option - 5.5" x 8.5" - 12" x 18" PF-7150 Dual 1,500-sheet Tray Option - 8.5" x 11" PF-7120 3,000-sheet Large Capacity Tray Option - 8.5" x 11"

Paper Weight:

(single)

Trays/MPT: 14 lb. Bond - 166 lb. Index (52 - 300gsm) Input Materials: Standard/Optional Trays: Plain, Bond, Recycled, Preprinted, Vellum, Color, Pre-Punched, Thick, Thin, High Quality, Letterhead, Envelope, Custom; MPT: Plain, Bond, Recycled, Preprinted, Vellum, Color, Pre-Punched, Thick, Thin, High Quality, Transparency (OHP), Coated, Index Tab, Label, Letterhead, Envelope, Custom

SECURITY SPECIFICATIONS

Local Authentication, Network Authentication, Encryption Communication (IPsec, HTTPS, TLS 1.3, LDAPS, SMTP/POP/ FTPS over TLS, SNMPv3), TPM chipset (Trusted Platform Module), S/MIME, SCEP (auto certificate issuance/renewal), OCSP/CRL (certificate validation), Secure Boot (firmware authenticity verification), Run Time Integrity Check, Data Security Kit 10 enhances IPsec communication (support for FIPS 140-2), HDD and Memory Overwrite (7x) Mode and HDD Dafa Encryption (256 bit), Common Criteria (ISO/IEC-15408/ EAL2), IEEE 2600.2

PRINT SPECIFICATION

Standard Controller: ARM Corlex-A53/1.6GHz PDLs/Emulations: PRESCRIBE, PCL6 (PCL-XL/PCL-5e), KPDL3 (PS3), XPS, OPEN XPS, PDF; Optional (UG 34): IBM ProPrinter, Line Printer, LQ-850 Print Resolution: Up to 4800 x 1200 dpi Fonts: KPDL3, PCL6, Bitmap OS Compatibility: Windows: 8.1/10/Server 2012/ Server 2012 R2/Server 2016/Server 2019; Mac OS X v10.0 or later; Chrome OS Mobile Printing: Apple AirPrint®, Moprie®,

Interfaces: Standard: 1000 Base-T/100-Base-Tx/10BASE-T (IPv6, IPv4, IPsec), 802.3az ready, High-Speed USB 3.0,

KYOCERA Mobile Print, KYOCERA MyPanel

Optional: IEEE 802.11a/b/g/n/ac (IB-37 for 2.4/5GHz), 10/100/1000BaseTX (IB-50 for Dual NIC); IEEE 802.11b/g/n (IB-51 for Wireless LAN Interface (supports up to 328.1 feet) Network Print and Supported Protocols: HTTPS, FTPS, SNMP v1/v2c/v3, Raw Port (Port 9100) TCP/IP, IPv4, IPv6, DHCP LPR, DNS. WSD Scan/Print DrIvers: KX Driver, PCL Mini Driver, KPDL Mini Driver, Network Fax Driver, TWAIN Driver, WIA Driver, Status Monitor, Common Profile, Output to PDF, Security Watermark, Super Resolution, Color Optimizer, MAC Driver, Chrome Print Driver, Linux Driver, KX Driver with Distributed Printing, Windows Inbox Driver, SANE Driver Utilities: KYOCERA Net Viewer, KYOCERA Net Device Manager, Quick Setup, KX PRESCRIBE Macro Generator,

ID Register, Software Management Service, Upgrade Studio,

Web Package Maker, Removal Tool, Wi-Fi Setup Tool,

PDF Direct Print, Command Center RX;

IEEE 802.11b/g/n Wireless LAN (supports up to 98.5 feet);

4 USB 2.0 Host Interfaces, 2 Expansion Slots,

SCAN SPECIFICATION

Kyocera Net Manager (option)

Scan Type: Color and Black & White Scanner Scan Resolution: 600/400/300/200 dpi, 200 x 100 dpi, 200 x 400 dpl

File Formats: TIFF, IPEG, XPS, OpenXPS, PDF/A-2.0 (MMR/JPG Compression/High Compression PDF); Option: Scan Extension Kit Text Searchable PDF; MS Office File Connectivity/Supported Protocols: 10 BASE-T/100 BASE-TX/1000 BASE-T (IPv6, IPv4, IPSec) TCP/IP, Hi-Speed USB 3.0

Scanning Functions: Scan-to-Folder (SMBv3), Scan-to-Email, Scan-to-FTPS over TLS, Scan-to-USB, PDF Digital Signatures, WSD Scan, DSM/SANE Scan, TWAIN Scan, Specified Color Removal, Border Erase, Preview

Original Size: Up to 11" x 17" (Glass) Drivers: TWAIN/WIA/DSM-SANE Driver/WSD Scan

OPTIONAL DOCUMENT PROCESSORS. Acceptable Originals: 5.5" x 8.5" - 11" x 17"

DP-7150: Reverse Auto Document Processor/140-sheets Speed: Simplex: 80 lpm; Duplex: 48 lpm (BW/Color) Weight: Simplex: 13 lb. Bond — 90 lb. Index (35 — 160gsm) Duplex: 16 lb. - 32 lb. Bond (50 - 120gsm)

DP-7160 (with multi-feed detection):

Dual Scan Document Processor/320-sheets Speed: Simplex: 137 ipm; Duplex: 274 ipm (BW/Color) Weights: Simplex: 13 lb. Band - 120 lb. Index (35 - 220gsm) Duplex: 16 lb. - 120 lb. Index (50 - 220gsm)

DP-7170 (with multi-feed and staple detection): Dual Scan Document Processor/320-sheets Speed: Simplex: 137 ipm; Duplex: 274 ipm (BW/Color) Weights: Simplex: 13 lb. Bond — 120 lb. Index (35 — 220gsm) Duplex: 16 lb. - 120 lb. Index (50 - 220gsm)

COPY SPECIFICATIONS

Copy Resolution: 600 x 600 dpi Image Mode: Text, Photo, Text/Photo, Graphic/Map Continuous Copy: 1 — 9,999 Additional Features: Auto Magnification, Auto Paper Select, Combine Copy, Mirror Image, Rotate Copy, Border Erase, Split Copy, Margin Shift, Page Number, Form Overlay, Blank Page Skip, Specified Color Removal, Proof Copy, Preview, ID Card Copy Job Management: 1,000 User Codes, Job Build, Shortcut Keys, Repeat Copy Magnification/Zoom: Full Size, 4 Reduction, 4 Enlargement Preset Ratios, 25 - 400% in 1% Step Increments Document Box: Custom/Job/USB Drive Box, Fax Box

OPTIONAL FAX SPECIFICATIONS

Fax Type: Fax System 12 (option) Type/Data Compression: G3 Fax/MMR, MR, MH, JBIG Transmission Speed/Modem Speed: Less than 3 seconds/33.6 Kbps Fax Memory: Standard 170 MB Driver: Network Fax Driver Fax Functions: Network Fax, Duplex Transmission and Reception, Encrypted Transmission and Reception, Polling Transmission and Reception, Broadcast, Fax Server Integration, Fax Dedicated Paper Feed Tray, Fax Forwarding to email or file

SOLUTIONS AND SERVICES

Remote Management

arding to email or file

Kyocera Fleet Services ready! A highly secure cloud-based monitoring solution that offers real-time visibility into your fleet. Optimize device uptime and be notified when to replenish supplies. Streamline billing with seamless 3rd party application integration, allowing you to focus solely on vour business.

Printing Software

Cost Control & Security Cloud & Mobile Printer Management

Content Services

Scan & Connect Intelligent Process Automation Enterprise Content Management

IT Solutions

Technology Solutions Including solutions for Cloud and Data Centers Network Infrastructure Cybersecurity Solutions Collaboration Solutions

Consulting Services Including IT Health Check CIO as a Service Healthcare Compliance Backup and Recovery Planning

Professional Services

Including Design and Architecture Project Implementation Project Management

Managed Services Including Help Desk Services Retainer Services and On-site Support

Output & Finishing Options₃

OPTIONAL 250 SHEET INNER SHIFT TRAY JS-7110
Stack Capacity: 250-sheets
Paper Size: 8.5" x 11" — 11" x 17"
Paper Weight: 14 lb. Bond — 166 lb. Index (52 — 300asm)

OPTIONAL 500 SHEET INTERNAL FINISHER DF-7100.

Stack/Staple Capacity; 500-sheets/50-sheets
Paper Size: 5.5" x 8.5" — 12" x 18"
Paper Weight: 14 lb. Bond — 166 lb. Index (52 — 300gsm)
Edge Staple Position: 3 Positions: Front: 1 Staple,
Edge: 1 Staple, Face: 2 Staples
Optional Punch: PH-7100 2/3 Hole Punch Unit,
supports 5.5" x 8.5" — 12" x 18"; 14 lb. Bond — 166 lb. Index
Dimensions: 19.4" W x 21" D x 6.9" H

Stack/Staple Capacity: Main Tray: 1,000-sheets/50-sheets (up to 24 lb. Bond [90gsm])
Paper Sixe: 5.5" x 8.5" – 12" x 18"
Paper Welght: 14 lb. Bond – 166 lb. Index (52 – 300gsm)
Edge Staple Position: 3 Positions: Top Left, Bottom Left,
Center Bind
Optional Punch: PH-7A 2/3 Hole Punch Unit,
supports 5.5" x 8.5" – 12" x 18"; 14 lb. Bond – 166 lb. Index
Dimensions: 21.6" W x 24.4" D x 41.3" H

OPTIONAL 1.000 SHEET FINISHER DF-71204

OPTIONAL 4,000 SHEET FINISHER DF-7140.

Stack/Staple Capacity: Main Tray (A): 4,000-sheets;

Sub Tray (B): 200-sheets/65-sheets (24 lb. Bond [90gsm])

Paper Size: 5.5" × 8.5" — 12" x 18"

Paper Weight: 14 lb. Bond — 166 lb. Index (52 — 300gsm)

Edge Staple Position: 3 Positions: Top Left, Bottom Left, Center Bind

Optional Punch: PH-7A 2/3 Hole Punch Unit, supports 5.5" x 8.5" — 12" x 18"; 14 lb. Bond —166 lb. Index Dimensions: 29" W x 26" D x 42" H

Optional Booklet Folder/Trifold Unit BF-730: (DF-7140)
Booklet Folder: supports 8.5" x 11", 8.5" x 14", 11" x 17"
Fold Booklet (staple): 16 lb. — 24 lb. Bond (60 — 90gsm)
20-sheets; 25 lb. — 28 lb. Bond (91 — 105gsm) 13-sheets;
Higher than 28 lb. Bond (Higher than 105 gsm) 1-sheet
Fold Booklet (no staple): 16 lb. — 24 lb. Bond (60 — 90gsm)
5-sheets; 25 lb. Bond — 72 lb. Index (91 — 120gsm) 3-sheets;
32 lb. Bond — 110 lb. Cover (121 — 256gsm) 1-sheet
Trifold: supports 8.5" x 11" only: 16 lb. — 24 lb. Bond
(60 — 90gsm) 5-sheets; 25 lb. Bond — 72 lb. Index
(91 — 120gsm) 3-sheets

Optional Multi-Bin Mallbox MT-730(B): (DF-7140) 7 Trays; supports: 16 lb. Bond — 90 lb. Index (60 — 163gsm); Slack Capacity per bin: 100-sheets: 5.5" x 8.5", 8.5" x 11"; 50-sheets: 8.5" x 14", 11" x 17" OPTIONAL 4,000 SHEET FINISHER DF-7150₄ Stack/Staple Capacity: Main Tray (A): 4,000-sheets; Sub Tray (B): 200-sheets/100-sheets (up to 20lb. Bond [80gsm])

Paper Size: 5.5" x 8.5" - 12" x 18"

Paper Weight: 14 lb. Bond — 166 lb. Index (52 — 300gsm) Edge Staple Position: 3 Positions: Top Left, Bottom Left, Center Bind

Optional Punch: PH-7A 2/3 Hole Punch Unit, Supports 5.5" x 8.5" – 12" x 18"; 14 lb. Bond — 166 lb. Index Dimensions: 29" W x 26" D x 42" H

Optional Booklet Folder/Trifold Unit BF-9100: (DF-7150) Booklet Folder: supports 8.5" x 11", 8.5" x 14", 11" x 17" Fold Booklet (staple): 14 lb. — 24 lb. Bond (52 — 90gsm) 20-sheets; 25 lb. — 28 lb. Bond (91 — 105gsm) 13-sheets; Higher than 28 lb. Bond (Higher than 105 gsm) 1-sheef Fold Booklet (no staple): 14 lb. — 24 lb. Bond (52 — 90gsm) 5-sheets; 24 lb. Bond — 28 lb. Index (91 — 105gsm) 3-sheets; 28 lb. Bond — 140 lb. Index (106 — 256gsm) 1-sheet Trifold: supports 8.5" x 11" only: 14 lb. — 24 lb. Bond (52 — 90gsm) 5-sheets; 25 lb. Bond — 28 lb. Index (91 — 105gsm) 3-sheets

ADDITIONAL OPTIONS

AK-7110 Bridge Unit Attachment Kil, J5-7100 Job Separator, HD-16 Large Capacity HDD (1TB), Banner Guide 10, Internet Fax Kit (A), Card Authentication Kit (B), Data Security Kit 10. Dual NIC (IB-50), Extended Range Wireless LAN NIC (IB-51), Thin Print option (UG-33), Printer Emulation option (UG-34), DT-730(B) Document Tray, Scan Extension Kit (A) for Taxt Searchable PDF; MS Office File, Keyboard Holder 10, Numeric Keypad (NK-7130), Cabinet Stand

, Requires PF-7140

- 2 Only 1 Document Processor can be installed
- 3 Only 1 Output Option can be installed
- 4 Requires Bridge Unit Atlachment Kil (AK-7110)

Specifications and design are subject to change without notice. For the latest on connectivity visit kyoceradocumentsolutions.us. TASKalfa, PRESCRIBE, Kyocera Net Manager, Kyocera Net Viewer, Kyocera Device Manager, PDF Direct Print, Command Center RX, and KX Driver are trademarks of The Kyocera Companies. Mac OS and AirPrint are trademarks of Apple, Inc. Mopria is a trademark of Mopria Alliance, Inc. Windows is a trademark of Microsoft, Inc. All other trademarks are the property of their respective owners.









Kyocera Document Solutions Partner

KYOCERA Document Solutions America 225 Sand Road, PO Box 40008 Fairfield, New Jersey 07004-0008, USA Tel: 973-808-8444




kyoceradocumentsolutions.us



Your Workplace Evolution, in Color

The Kyocera Evolution Series continues to grow with the addition of a new range of high-impact color A3 MFPs. These robust devices boast industry-leading technology and security, along with outstanding print and scan speeds, to ensure impeccable quality output every single time. Join the Evolution today and add a new dimension to your business.

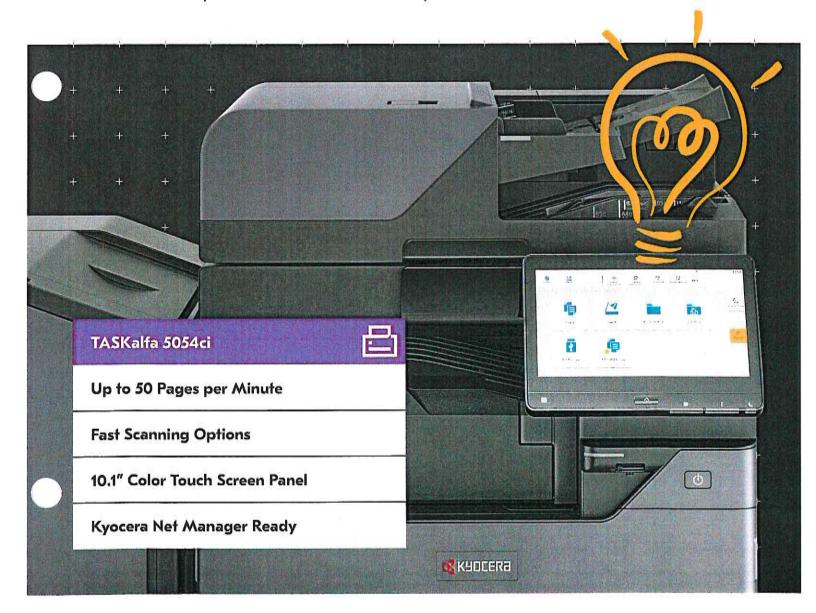

TASKalfa 5054ci

BASIC SPECIFICATIONS

Configuration: Color MFP - Print/Scan/Copy/Optional Fax Speed: Letter: 50 ppm, Legal: 30 ppm, Ledger: 25 ppm (print only)

Warm Up Time: 17 seconds or less (power on) First Page Out:

Copy: 3.7 seconds BW, 4.8 seconds Color
Print: 4.3 seconds BW, 5.4 seconds Color
Display: 10.1" Color Touch Screen Control Panel
Memory/Hard Disk Drive: 4GB RAM/32GB SSD/
32GB HDD Standard, 1TB HDD (option)
Duplex: Standard Stackless Duplex supports Statement
(5.5" x 8.5") to Ledger (12" x 18"), 16 lb. Bond - 142 lb. Index
(60 — 256gsm)
up to 12" x 48" Banner (single sheet)
Electrical Requirements: 120V, 60Hz, 12A;
220-240V, 50/60Hz, 7.2A
Typical Electricity Consumption (TEC): 120V: .66 kWh/week;
220V: .63 kWh/week
Dimensions: 23.7" W x 26.1" D x 31.1" H

DADED CLIPPLY

Weight: 209.4 lbs

Paper Capacity: Standard 1,150-sheets; Maximum 7,150-sheets Standard Paper Sources: Dual 500-sheet Trays, 150-sheet MPT, Auto Selection/Switching Standard Paper Size:

Tray 1 - 5.5" x 8.5" - 8.5" x 14" (statement to legal)

Tray 2 - 5.5" x 8.5" - 12" x 18", Custom Size

MPT: 5.5" x 8.5" - 12" x 18" (multiple); to 12" x 48" Banner (single)

Maximum Monthly Duty Cycle: 225,000 Pages per Month

Optional Paper Sources

PF-7140 Dual 500-sheet Tray Option - 5.5" x 8.5" — 12" x 18" PF-7150 Dual 1,500-sheet Tray Option - 8.5" x 11" PF-7120 3,000-sheet Large Capacity Tray Option - 8.5" x 11"

Paper Weights

Trays/MPT: 14 lb. Bond — 166 lb. Index (52 — 300gsm)
Input Materials: Standard/Optional Trays: Plain, Bond,
Recycled, Preprinted, Vellum, Color, Pre-Punched, Thick, Thin,
High Quality, Letterhead, Envelope, Custom; MPT: Plain, Bond,
Recycled, Preprinted, Vellum, Color, Pre-Punched, Thick, Thin,
High Quality, Transparency (OHP), Coated, Index Tab, Label,
Letterhead, Envelope, Custom

SECURITY SPECIFICATIONS

Local Authentication, Network Authentication, Encryption Communication (IPsec, HTTPS, TLS 1.3, SAMP/POP/FTPS over TLS, SNMPv3), TPM chipset (Trusted Platform Module), S/MIME, SCEP (auto certificate issuance/renewal), OCSP/CRL (certificate validation), Secure Boot (tirmware authenticity vertication), Run Time Integrity Check, Data Security Kit 10 enhances IPsec communication (support for FIPS 140-2), HDD and Memory Overwrite (7x) Mode and HDD Data Encryption (256 bit), Common Criteria (ISO/IEC-15408/EAL2), IEEE 2600.2

PRINT SPECIFICATION

Standard Controller: ARM Cortex-A53/1.6GHz PDLs/Emulations: PRESCRIBE, PCL6 (PCL-XL/PCL-5e), KPDL3 (PS3), XP5, OPEN XP5, PDF; Optional (UG 34): IBM ProPrinter, Line Printer, LQ-850

Print Resolution: Up to 4800 x 1200 dpl

Fonts: KPDL3, PCL6, Bitmap

OS Compatibility: Windows: 8.1/10/Server 2012/Server 2012 RZ/Server 2016/Server 2019; Mac OS X v10.0 or later; Chrome OS

Chrome OS
Mobile Printing: Apple AirPrint®, Mopria®,
KYOCERA Mobile Print, KYOCERA MyPanel
Interfaces: Standard: 1000 Base-T/100-Base-Tx/108ASE-T
(IPv6, IPv4, IPsec), 802.3az ready, High-Speed USB 3.0,
4 USB 2.0 Host Interfaces, 2 Expansion Slots,

IEEE 802.11b/g/n Wireless LAN (supports up to 98.5 feet);
Optional: IEEE 802.11e/b/g/n/ac (IB-37 for Z.4/5GHz),
10/100/1000BaseTX (IB-50 for Dual NIC); IEEE 802.11b/g/n
(IB-51 for Wireless LAN Interface (supports up to 328.1 feet)
Network Print and Supported Protocols: HTTPS, FTPS, SNMP
v1/v2c/v3, Raw Port (Port 9100) TCP/IP, IPv4, IPv6, DHCP LPR,
DNS, WSD Scan/Print
Drivers: KX Driver, PCL Mint Driver, KPDL Mint Driver,
Network Fax Driver, TWAIN Driver, WIA Driver, Status Monitor,
Common Profile, Output to PDF, Security Watermark, Super
Resolution, Color Optimizer, MAC Driver, Chrome Print Driver,
Linux Driver, KX Driver with Distributed Printing,
Windows Inbox Driver, SANE Driver
Utilities: KYOCERA Net Viewer, KYOCERA Net Device

Windows Inbox Driver, SANE Driver
Utilities: KYOCERA Net Viewer, KYOCERA Net Device
Meneger, Quick Setup, KX PRESCRIBE Macro Generator,
ID Register, Software Management Service, Upgrade Studio,
Web Package Maker, Removal Tool, Wi-Fi Setup Tool,
PDF Direct Print, Command Center RX;
Kyocera Net Manager (option)

SCAN SPECIFICATION

Scan Type: Color and Black & White Scanner
Scan Resolution: 600/400/300/200 dpi, 200 x 100 dpi,
200 x 400 dpi
File Formals: TIFF, IPEG, XPS, OpenXPS, PDF/A-2.0
(MMR/IPG Compression/High Compression PDF);
Option: Scan Extension Kit Text Searchable PDF: MS Office File
Connectivity/Supported Profocols: 10 BASE-TX/1000
BASE-TX/1000 BASE-T (IPv6, IPv4, IPSec) TCP/IP,

Hi-Speed USB 3.0
Scanning Functions: Scan-to-Folder (SMBv3), Scan-to-Email, Scan-to-FTPS over TLS, Scan-to-USB, WSD Scan, DSM/SANE Scan, TWAIN Scan, Specified Color Removal, Border Erase, Preview, PDF Digital Signatures
Original Size: Up to 11" x 17" (Glass)
Drivers: TWAIN/WIA/DSM-SANE Driver/WSD Scan

OPTIONAL DOCUMENT PROCESSORS₂
Acceptable Originals: 5.5" x 8.5" - 11" x 17"

DP-7150: Reverse Auto Document Processor/140-sheets Speed: Simplex: 80 ipm; Duplex: 48 ipm (BW/Color) Weight: Simplex: 13 lb. Bond – 90 lb. Index (35 – 160gsm) Duplex: 16 lb. – 32 lb. Bond (50 – 120gsm)

DP-7160 (with multi-feed defection):
Dual Scan Document Processor/320-sheels
Speed: Simplex: 137 ipm; Duplex: 274 ipm (BW/Color)
Weights: Simplex: 13 lb. Bond — 120 lb. Index (35 — 220gsm)
Duplex: 16 lb. — 120 lb. Index (50 — 220gsm)

DP-7170 (with multi-feed and staple detection):
Dual Sean Document Processor/320-sheets
Speed: Simplex: 137 Ipm; Duplex: 274 Ipm (BW/Color)
Weights: Simplex: 13 lb. Bond — 120 lb. Index (35 — 220gsm)
Duplex: 16 lb. — 120 lb. Index (50 — 220gsm)

COPY SPECIFICATIONS

Copy Resolution: 600 x 600 dpi
Image Mode: Text, Photo, Text/Photo, Graphic/Map
Continuous Copy: 1 — 9,999
Additional Features: Auto Magnification, Auto Paper Select,
Combine Copy, Micror Image, Rotate Copy, Border Erese,
Split Copy, Margin Shift, Page Number, Form Overlay,
Blank Page Skip, Specified Color Removal, Proof Copy,
Preview, ID Card Copy
Job Management: 1,000 User Codes, Job Build, Shortcut Keys,
Repeat Copy
Magnification/Zoom: Full Size, 4 Reduction, 4 Enlargement
Preset Ratios, 25 — 400% in 1% Step Increments
Document Box: Custom/Job/USB Drive Box, Fax Box
(w/option)

OPTIONAL FAX SPECIFICATIONS
Fax Types Fax System 12 (option)
Type/Data Compression: G3 Fax/MMR, MR, MH, IBIG
Transmission Speed/Modem Speedi Less than
3 seconds/33.6 Kbps
Fax Memory: Standard 170 MB
Driver: Network Fax Driver
Fax Functions: Network Fax, Duplex Transmission and
Reception, Encrypted Transmission and Reception,
Polling Transmission and Reception, Broadcast,
Fax Server Integration, Fax Dedicated Paper Feed Tray,
Fax Forwarding to email or file

SOLUTIONS AND SERVICES

Remote Management

Kyocera Fleet Services ready! A highly secure cloud-based monitoring solution that offers real-time visibility into your fleet. Optimize device uptime and be notified when to replenish supplies. Streamline billing with seamless 3rd party application integration, allowing you to focus solely on your business.

Printing Software Cost Control & Security Cloud & Mobile Printer Management

Content Services Scan & Connect Intelligent Process Automation Enterprise Content Management

IT Solutions
Technology Solutions
Including solutions for Cloud and Data Centers
Network Infrastructure
Cybersecurity Solutions
Collaboration Solutions

Consulting Services
Including IT Health Check
CIO as a Service
Healthcare Compliance
Backup and Recovery Planning

Professional Services Including Design and Architecture Project Implementation Project Management

Managed Services Including Help Desk Services Retainer Services and On-site Support

Output & Finishing Options₃

OPTIONAL 250 SHEET INNER SHIFT TRAY IS-7110 Stack Capacity: 250-sheets Paper Size: 8.5" x 11" - 11" x 17" Paper Weight: 14 lb. Bond - 166 lb. Index (52 - 300gsm)

OPTIONAL 500 SHEET INTERNAL FINISHER DF-7100a Stack/Staple Capacity: 500-sheets/50-sheets Paper Size: 5.5" x 8.5" - 12" x 18" Paper Weight: 14 lb. Bond - 166 lb. Index (52 - 300gsm) Edge Staple Position: 3 Positions: Front: 1 Staple, Edge: 1 Staple, Face: 2 Staples Optional Punch: PH-7100 2/3 Hole Punch Unit, supports 5.5" x 8.5" - 12" x 18"; 14 lb, Bond - 166 lb, Index Dimensions: 19.4" W x 21" D x 6.9" H

Stack/Staple Capacity: Main Tray: 1,000-sheets/50-sheets (up to 24 lb. Bond [90gsm]) Paper Size: 5.5" x 8.5" - 12" x 18" Paper Weight: 14 lb. Bond - 166 lb. Index (52 - 300gsm) Edge Staple Position: 3 Positions: Top Lett, Bottom Left, Center Bind

OPTIONAL 1,000 SHEET FINISHER DF-71204

Optional Punch: PH-7A 2/3 Hole Punch Unit, supports 5.5" x 8.5" - 12" x 18"; 14 lb. Bond - 166 lb. Index Dimensions: 21.6" W x 24.4" D x 41.3" H

OPTIONAL 4,000 SHEET FINISHER DF-71404 Stack/Staple Capacity: Main Tray (A): 4,000-sheets; Sub Tray (B): 200-sheets/65-sheets (up to 24 lb. Bond [90gsm]) Paper Size: 5.5" x 8.5" - 12" x 18"

Paper Weight: 14 lb. Bond - 166 lb. Index (52 - 300gsm) Edge Staple Position: 3 Positions: Top Left, Bottom Left, Center Bind

Optional Punch: PH-7A 2/3 Hole Punch Unit, supports 5.5" x 8.5" - 12" x 18"; 14 lb. Bond -166 lb. Index Dimensions: 29" W x 26" D x 42" H

Optional Booklet Folder/Trifold Unit BF-730: (DF-7140) Booklet Folder: supports 8.5" x 11", 8.5" x 14", 11" x 17" Fold Booklet (staple): 16 lb. — 24 lb. Bond (60 — 90gsm) 20-sheets; 25 lb. - 28 lb. Bond (91 - 105gsm) 13-sheets; Higher than 28 lb. Bond (Higher than 105 gsm) 1-sheet Fold Booklet (no staple): 16 lb. - 24 lb. Bond (60 - 90gsm) 5-sheets; 25 lb. Bond — 72 lb. Index (91 — 120gsm) 3-sheets; 32 lb. Bond - 110 lb. Cover (121 - 256gsm) 1-sheet Trifold: supports 8.5" x 11" only: 16 lb. - 24 lb. Bond (60 - 90gsm) 5-sheets; 25 lb. Bond - 72 lb. Index (91 - 120gsm) 3-sheets

Optional Multi-Bin Mailbox MT-730(B): (DF-7140) 7 Trays; supports: 16 lb. Bond — 90 lb. Index (60 — 163gsm); Stack Capacity per bin: 100-sheets: 5.5" x 8.5", 8.5" x 11"; 50-sheets: 8.5" x 14", 11" x 17"

OPTIONAL 4,000 SHEET FINISHER DF-71504 Stack/Staple Capacity: Main Tray (A): 4,000-sheets; Sub Tray (B): 200-sheets/100-sheets (up to 20 lb. Bond (80gsml) Paper Size: 5.5" x 8.5" - 12" x 18"

Paper Weight: 14 lb. Bond — 166 lb. Index (52 — 300gsm) Edge Staple Position: 3 Positions: Top Left, Bottom Left, Center Bind

Optional Punch: PH-7A 2/3 Hole Punch Unit. Supports 5.5" x 8.5" - 12" x 18"; 14 lb. Bond - 166 lb. Index Dimensions: 29" W x 26" D x 42" H

Optional Booklet Folder/Trifold Unit BF-9100: (DF-7150) Booklet Folder: supports 8.5" x 11", 8.5" x 14", 11" x 17" Fold Booklet (staple): 14 lb. - 24 lb. Bond (52 - 90gsm) 20-sheets; 25 lb. - 28 lb. Bond (91 - 105gsm) 13-sheets; Higher than 28 lb. Bond (Higher than 105 gsm) 1-sheet Fold Booklet (no staple): 14 lb. — 24 lb. Bond (52 — 90gsm) 5-sheets; 24 lb. Bond - 28 lb. Index (91 - 105gsm) 3-sheets; 28 lb. Bond - 140 lb. Index (106 - 256gsm) 1-sheet

Trifold: supports 8.5" x 11" only: 14 lb. - 24 lb. Bond (52 - 90gsm) 5-sheets; 25 lb. Bond - 28 lb. Index (91 - 105gsm) 3-sheets

ADDITIONAL OPTIONS

AK-7110 Bridge Unit Attachment Kit, JS-7100 Job Separator, HD-16 Large Capacity HDD (1TB), Banner Guide 10, Internet Fax Kit (A), Card Authentication Kit (B), Data Security Kit 10. Dual NIC (IB-50), Extended Range Wireless LAN NIC (IB-51), Thin Print option (UG-33), Printer Emulation option (UG-34), DT-730(B) Document Tray, Scan Extension Kit (A) for Text Searchable PDF; MS Office File, Keyboard Holder 10, Numeric Keypad (NK-7130), Cabinet Stand, EFI Printing System 17 - Fiery Controller

- Regules PF-7140
- 3 Only 1 Document Processor can be installed
- only 1 Output Option can be installed Requires Bridge Unit Atlachment Kil (AK-7110)

Specifications and design are subject to change without notice. For the latest on connectivity visit kyoceradocumentsolutions.us. TASKalfa, PRESCRIBE, Kyocera Net Manager, Kyocera Net Viewer, Kyocera Device Manager, PDF Direct Print, Command Center RX, and KX Driver are trademarks of The Kyocera Companies. Mac OS and AirPrint are trademarks of Apple, Inc. Mopria is a trademark of Mopria Alliance, Inc. Windows is a trademark of Microsoft, Inc. All other trademarks are the property of their respective owners.









Kyocera Document Solutions Partner

KYOCERA Document Solutions America 225 Sand Road, PO Box 40008 Fairfield, New Jersey 07004-0008, USA Tel: 973-808-8444




kyoceradocumentsolutions.us



Your Workplace Evolution

These monochrome additions to the Kyocera Evolution Series are designed to keep your costs low and your efficiency at its highest. With the latest security compliance, rapid print and scan speeds, and a more engaging user experience, they will optimize your workflows and maximize productivity. Join the Evolution today and keep your business at the cutting edge!

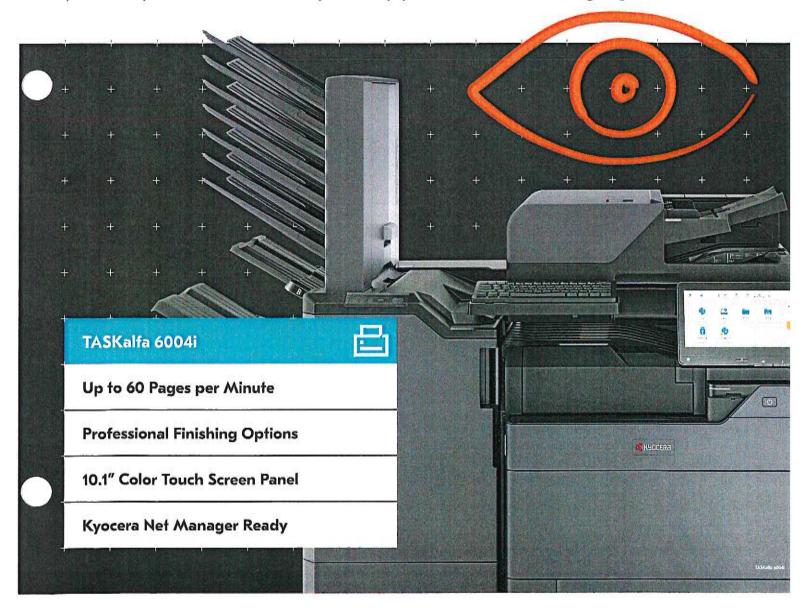

TASKalfa 6004i

BASIC SPECIFICATIONS

Configuration: BW MFP - Print/Scan/Copy/Optional Fax Speed: Letter: 60 ppm, Legal: 36 ppm, Ledger: 30 ppm (print only)

Warm Up Time: 17 seconds or less (power on) First Page Out:

Copy: 3.4 seconds

Print: 3.8 seconds

Display: 10.1° Color Touch Screen Control Panel Memory/Hard Disk Drive: 4GB RAM/32GB SSD/ 320GB HDD Standard, 1TB HDD (option)

Duplex: Standard Stackless Duplex supports Statement (5.5" x 8.5") to Ledger (12" x 18"), 16 lb. Bond - 142 lb. Index (60 — 256gsm)

Standard Output Tray: Statement — 12" x 18"/500-sheets; up to 12" x 48" Banner (single sheet) Electrical Requirements: 120V, 60Hz, 12A;

220-240V, 50/60Hz, 7.2A

Typical Electricity Consumption (TEC): 120V: .80 kWh/week; 220V: .78 kWh/week

Dimensions: 23.7" W x 26.1" D x 31.1" H Weight: 182 lbs

Maximum Monthly Duty Cycle: 250,000 Pages per Month

Paper Capacity: Standard 1,150-sheets; Maximum 7,150-sheets

PAPER SUPPLY

Standard Paper Sources: Dual 500-sheet Trays, 150-sheet MPT, Auto Selection/Switching Standard Paper Size: Tray 1 – 5.5" x 8.5" – 8.5" x 14" (statement to legal) Tray 2 – 5.5" x 8.5" – 12" x 18", Custom Size MPT: 5.5" x 8.5" – 12" x 18" (multiple); to 12" x 48" Banner

Optional Paper Sources:

PF-7140 Dual 500-sheet Tray Option - 5.5" x 8.5" — 12" x 18" PF-7150 Dual 1,500-sheet Tray Option - 8.5" x 11" PF-7120 3,000-sheet Large Capacity Tray Option - 8.5" x 11"

Paper Weight:

(single)

Trays/MPT: 14 lb. Bond — 166 lb. Index (52 — 300gsm)
Input Materials: Standard/Optional Trays: Plain, Bond,
Recycled, Praprinted, Vellum, Color, Pre-Punched, Thick, Thin,
High Quality, Letterhead, Envelope, Custom; MPT: Plain, Bond,
Recycled, Preprinted, Vellum, Color, Pre-Punched, Thick, Thin,
High Quality, Transparency (OHP), Coated, Index Tab, Label,
Letterhead, Envelope, Custom

SECURITY SPECIFICATIONS

Local Authentication, Network Authentication, Encryption Communication (IPsec, HTTPS, TLS 1.3, LDAPS, SMTP/POP/FTPS over TLS, SNMPv3), TPM chipset (Trusted Platform Module), 5/MIME, SCEP (auto certificate Issuance/renewal), OCSP/CRL (certificate validation), Secure Boot (firmware authenticity verification), Run Time Integrity Check, Data Security Kit 10 enhances IPsec communication (support for FIPS 140-2), HDD and Memory Overwrite (7x) Mode and HDD Data Encryption (256 bit), Common Criteria (ISO/IEC-15408/EAL2), IEEE 2600.2

PRINT SPECIFICATION

Standard Controller: ARM Cortex-A53/1.6GHz
PDLs/Emulations: PRESCRIBE, PCL6 (PCL-XL/PCL-5e), KPDL3
(PS3), XPS, OPEN XPS, PDF; Optional (UG 34): IBM ProPrinter,
Line Printer, LQ-850
Print Resolution: Up to 4800 x 1200 dpi
Fonts: KPDL3, PCL6, Bitmap
OS Compatibility: Windows: 8.1/10/Server 2012/
Server 2012 R2/Server 2016/Server 2019;
Mac OS X v10.0 or later; Chrome OS
Mobile Printing: Apple AirPrint®, Mopria®,

KYOCERA Mobile Print, KYOCERA MyPanel Interfaces: Standard: 1000 Base-T/100-Base-Tx/10BASE-T (IPv6, IPv4, IPsec), 802.3az ready, High-Speed USB 3.0, 4 USB 2.0 Host Interfaces, 2 Expansion Slots, IEEE 802.11b/g/n Wireless LAN (supports up to 98.5 feet); Optional: IEEE 802.11a/b/g/n/ac (IB-37 for 2.4/5GHz), 10/100/1000BaseTX (IB-50 for Dual NIC); IEEE 802.11b/g/n (IB-51 for Wireless LAN Interface (supports up to 328.1 feet) Network Print and Supported Protocols: HTTPS, FTPS, SNMP v1/v2c/v3, Raw Port (Port 9100) TCP/IP, IPv4, IPv6, DHCP LPR, DNS, WSD Scan/Print Drivers KX Driver, PCL Mini Driver, KPDL Mini Driver, Natural East Driver, TWAIN Driver, WIA Driver, Status Monitors

Network Fax Driver, TVAIN Driver, WIA Driver, Stafus Manilor,
Common Profile, Output to PDF, Security Watermark, Super
Resolution, Color Optimizer, MAC Driver, Chrome Print Driver,
Linux Driver, KX Driver with Distributed Printing,
Windows Inbox Driver, SANE Driver
Utilities: KYOCERA Net Viewer, KYOCERA Net Device

Utilities: KYOCERA Net Viewer, KYOCERA Net Device Manager, Quick Selup, KX PRESCRIBE Macro Generator, ID Register, Software Management Service, Upgrade Studio, Web Package Maker, Removal Tool, Wi-Fi Setup Tool, PDF Direct Print, Command Center RX; Kyocera Net Manager (option)

SCAN SPECIFICATION

Scan Type: Color and Black & White Scanner
Scan Resolution: 600/400/300/200 dpi, 200 x 100 dpi,
200 x 400 dpi
File Formats: TIFF, JPEG, XPS, OpenXPS, PDF/A-2.0
(MMR/JPG Compression/High Compression PDF);
Option: Scan Extension Kit Text Searchable PDF; MS Office File
Connectivity/Supported Protocols: 10 BASE-T/100
BASE-TX/1000 BASE-T (IPv6, IPv4, IPSec) TCP/IP,
Hi-Speed USB 3.0
Scanning Functions: Scan-to-Folder (SMBv3), Scan-to-Email,
Scan-to-FTPS over TLS, Scan-to-USB, PDF Digital Signatures,
WSD Scan, DSM/SANE Scan, TWAIN Scan, Specified Color
Removal, Border Erase, Preview

OPTIONAL DOCUMENT PROCESSORS

Original Size: Up to 11" x 17" (Glass)

Acceptable Originals: 5.5" x 8.5" - 11" x 17"

DP-7150: Reverse Auto Document Processor/140-sheets Speed: Simplex: 80 ipm; Duplex: 48 ipm (BW/Color) Weight: Simplex: 13 lb. Bond – 90 lb. Index (35 – 160gsm) Duplex: 16 lb. – 32 lb. Bond (50 – 120gsm)

Drivers: TWAIN/WIA/DSM-SANE Driver/WSD Scan

DP-7160 (with multi-feed detection):

Dual Scan Document Processor/320-sheets Speed: Simplex: 137 ipm; Duplex: 274 ipm (BW/Color) Weights: Simplex: 13 lb. Bond — 120 lb. Index (35 — 220gsm) Duplex: 16 lb. — 120 lb. Index (50 — 220gsm)

DP-7170 (with multi-feed and staple detection):
Dual Scan Document Processor/320-sheets
Speed: Simplex: 137 ipm; Duplex: 274 ipm (BW/Color)
Weights: Simplex: 13 lb. Bond — 120 lb. Index (35 — 220gsm)
Duplex: 16 lb. — 120 lb. Index (50 — 220gsm)

COPY SPECIFICATIONS

Copy Resolution: 600 x 600 dpi Image Mode: Text, Photo, Text/Photo, Graphic/Map Continuous Copy: 1 — 9,999

Additional Features: Auto Magnification, Auto Paper Select, Combine Copy, Mirror Image, Rotate Copy, Border Erase, Split Copy, Margin Shiff, Page Number, Form Overlay, Blank Page Skip, Specified Color Removal, Proof Copy, Preview, ID Card Copy

Job Management: 1,000 User Codes, Job Build, Shortcut Keys, Repeal Copy

Magnification/Zoom: Full Size, 4 Reduction, 4 Enlargement Preset Ratios, 25 — 400% in 1% Step Increments Document Box: Custom/Job/USB Driva Box, Fox Box (w/option)

OPTIONAL FAX SPECIFICATIONS

Fax Type: Fax System 12 (option)
Type/Data Compression: G3 Fax/MMR, MR, MH, IBIG
Transmission Speed/Modern Speed: Less than
3 seconds/33.6 Kbps
Fax Memory: Standard 170 MB
Driver: Network Fax Driver
Fax Functions: Network Fax, Duplex Transmission and
Reception, Encrypted Transmission and Reception,
Polling Transmission and Reception,
Polling Transmission and Reception,
Fax Server Integration, Fax Dedicated Paper Feed Tray,
Fax Forwarding to email or file

SOLUTIONS AND SERVICES

Remote Management

Kyocara Fleet Services ready! A highly secure cloud-based monitoring solution that offers real-line visibility into your fleet. Optimize device uptime and be notified when to replenish supplies. Streamline billing with seamless 3rd party application integration, allowing you to focus solely on your business.

Printing Software Cost Control & Security Cloud & Mobile

Printer Management

Content Services Scan & Connect

Intelligent Process Automation Enterprise Content Management

IT Solutions

Technology Solutions Including solutions for Cloud and Data Centers Natiwork Infrastructure Cybersecurity Solutions Collaboration Solutions

Consulting Services Including IT Health Check CIO as a Service Healthcare Compliance Backup and Recovery Planning

Professional Services Including Design and Architecture Project Implementation Project Management

Managed Services Including Help Desk Services Retainer Services and On-site Support

Output & Finishing Options₃

OPTIONAL 250 SHEET INNER SHIFT TRAY IS-7110

Stack Capacity: 250-sheets Paper Size: 8.5" x 11" - 11" x 17" Paper Weight: 14 lb. Bond - 166 lb. Index (52 - 300gsm)

OPTIONAL 500 SHEET INTERNAL FINISHER DF-7100,

Stack/Staple Capacity: 500-sheets/50-sheets Paper Size: 5.5" x 8.5" - 12" x 18" Paper Weight: 14 lb. Bond - 166 lb. Index (52 - 300gsm) Edge Staple Position: 3 Positions: Front: 1 Staple, Edge: 1 Staple, Face: 2 Staples Optional Punch: PH-7100 2/3 Hole Punch Unit, supports 5.5" x 8.5" - 12" x 18"; 14 lb. Bond - 166 lb. Index Dimensions: 19.4" W x 21" D x 6.9" H

OPTIONAL 1,000 SHEET FINISHER DF-71204

Stack/Staple Capacity: Main Tray: 1,000-sheets/50-sheets (up to 24 lb. Bond [90gsm]) Paper Size: 5.5" x 8.5" - 12" x 18" Paper Weight: 14 lb. Bond - 166 lb. Index (52 - 300gsm) Edge Staple Position: 3 Positions: Top Left, Bottom Left, Center Bind

Optional Punch: PH-7A 2/3 Hole Punch Unit. supports 5.5" x 8.5" - 12" x 18"; 14 lb. Bond - 166 lb. Index Dimensions: 21.6" W x 24.4" D x 41.3" H

OPTIONAL 4,000 SHEET FINISHER DF-71404

Sub Tray (B): 200-sheets/65-sheets (24 lb. Bond [90gsm]) Paper Size: 5.5" x 8.5" - 12" x 18" Paper Weight: 14 lb. Bond - 166 lb. Index (52 - 300gsm) Edge Staple Position: 3 Positions: Top Lett, Bottom Lett, Center Bind

Stack/Staple Capacity: Main Tray (A): 4,000-sheets;

Optional Punch: PH-7A 2/3 Hole Punch Unit, supports 5.5" x 8.5" - 12" x 18"; 14 lb. Bond -166 lb. Index Dimensions: 29" W x 26" D x 42" H Optional Booklet Folder/Trifold Unit BF-730: (DF-7140) Booklet Folder: supports 8.5" x 11", 8.5" x 14", 11" x 17" Fold Booklet (staple): 16 lb. - 24 lb. Bond (60 - 90gsm) 20-sheets; 25 lb. - 28 lb. Bond (91 - 105gsm) 13-sheets

Fold Booklet (no staple): 16 lb. — 24 lb. Bond (60 — 90gsm) 5-sheets; 25 lb. Bond — 72 lb. Index (91 — 120gsm) 3-sheets; 32 lb. Bond — 110 lb. Cover (121 — 256gsm) 1-sheet Trifold: supports 8.5" x 11" only: 16 lb. - 24 lb. Bond (60 - 90gsm) 5-sheets; 25 lb. Bond - 72 lb. Index (91 - 120gsm) 3-sheets

Optional Multi-Bin Mailbox MT-730(B): (DF-7140) 7 Trays; supports: 16 lb. Bond — 90 lb. Index (60 — 163gsm); Stack Capacity per bin: 100-sheets: 5.5" x 8.5", 8.5" x 11"; 50-sheets: 8.5" x 14", 11" x 17"

OPTIONAL 4,000 SHEET FINISHER DF-71504

Stack/Staple Capacity: Main Tray (A): 4,000-sheets; Sub Tray (B): 200-sheets/100-sheets (up to 20lb. Bond (80asm1)

Paper Size: 5.5" x 8.5" - 12" x 18"

Paper Weight: 14 lb. Bond - 166 lb. Index (52 - 300gsm) Edge Staple Position: 3 Positions: Top Left, Bottom Left, Center Bind

Optional Punch: PH-7A 2/3 Hole Punch Unit, supports 5.5" x 8.5" — 12" x 18"; 14 lb. Bond — 166 lb. Index Dimensions: 29" W x 26" D x 42" H

Optional Booklet Folder/Trifold Unit BF-9100: (DF-7150) Booklet Folder: supports 8.5" x 11", 8.5" x 14", 11" x 17 Fold Booklet (staple): 14 lb. - 24 lb. Bond (52 - 90gsm) 20-sheets: 25 lb. - 28 lb. Bond (91 - 105gsm) 13-sheets; Higher than 28 lb. Bond (Higher than 105 gsm) 1-sheet Fold Booklet (no staple): 14 lb. — 24 lb. Bond (52 — 90gsm) 5-sheets; 24 lb. Bond — 28 lb. Index (91 — 105gsm) 3-sheets; 28 lb. Bond — 140 lb. Index (106 — 256gsm) 1-sheet Trifold: supports 8.5" x 11" only: 14 lb. - 24 lb. Bond (52 - 90gsm) 5-sheets; 25 lb. Bond - 28 lb. Index (91 - 105gsm) 3-sheets

OPTIONAL INSERTER UNIT IS-7100

Paper Capacity: 250-sheets x 2 Trays (based on 20 lb. Bond [80gsm]) Function: Feeds Front, Back Covers or Sheet Insertion Paper Size: 5.5" x 8.5" - 12" x 18" Paper Weight: 14 lb. Bond - 166 lb. Index (52 - 300gsm) Dimensions: 27.6" W x 24.2" D x 52.4" H

OPTIONAL Z-FOLD UNIT ZF-7100;

Fold Type Supported: Z-Fold: 1-sheet folded (18 - 28 lb. Bond [64 - 105gsm]) Bi-Fold: 1-sheet folded (18 - 28 lb. Bond [64 - 105gsm]) Inner/Outer Trifold (based on 8.5 x 11R): 3-sheets (up to 20 lb. Bond [64 - 74gsm]) 2-sheets (up to 24 lb. Bond [70 - 90gsm]) 1-sheet (up to 28 lb. Bond [91 - 105gsm]) 1-sheet (for all other sized sheets) Paper Sizes Supported: Z-Fold: 8.5" x 11R - 11" x 17" Bi-Fold: 8.5" x 11" - 12" x 18" Trifold: 8.5" x 11" - 11" x 17" Dimensions: 8.2" W x 28.7" D x 38.5" H

ADDITIONAL OPTIONS

AK-7110 Bridge Unit Attachment Kil, AK-7120 Bridge Unit Attachment Kit (ZF-7100), JS-7100 Job Separator, HD-16 Large Capacity HDD (1TB), Banner Guide 10, Internet Fax Kit (A), Card Authentication Kit (B), Data Security Kit 10, Dual NIC (IB-50), Extended Range Wireless LAN NIC (IB-51), Thin Print option (UG-33), Printer Emulation option (UG-34), DT-730(B) Document Tray, Scan Extension Kit (A) for Text Searchable PDF; MS Office File, Keyboard Holder 10, Numeric Keypad (NK-7130), Cabinel Stand

- Requires PF-7140
- 3 Only 1 Document Processor can be installed
- Only 1 Output Option can be installed
- , Requires Bridge Unit Atlachment Kit (AK-7110) Requires Bridge Unit Attachment Kit (AK-7120)

Specifications and design are subject to change without notice. For the latest on connectivity visit kyoceradocumentsolutions.us. TASKalfa, PRESCRIBE, Kyocera Net Manager, Kyocera Net Viewer, Kyocera Device Manager, PDF Direct Print, Command Center RX, and KX Driver are trademarks of The Kyocera Companies. Mac OS and AirPrint are trademarks of Apple, Inc. Mopria is a trademark of Mopria Alliance, Inc. Windows is a trademark of Microsoft, Inc. All other trademarks are the property of their



respective owners.







KYOCERA Document Solutions America 225 Sand Road, PO Box 40008 Fairfield, New Jersey 07004-0008, USA Tel: 973-808-8444



Kyocera Document Solutions Partner

kyoceradocumentsolutions.us



> PRINT > COPY > SCAN > FAX

ECOSYS M2040dn (3-in-1) ECOSYS M2540dn (4-in-1) ECOSYS M2640idw (4-in-1)

MONOCHROME MULTIFUNCTION PRODUCT FOR A4 FORMAT

GENUINE MFP, WITH HIGH RELIABILITY AND PRODUCTIVITY



- . Speedy A4 copy/print up to 40 ppm (Mono).
- Standard 512MB RAM to perform heavy duty tasks without additional memory required.
- · Support Air Print and Mopria certified.
- · Convenient built-in wireless LAN interface*.
- User friendly 4.3 inch color touch screen panel*.
- Fast scanning up to 40/23 ipm Mono/Color.
- Standard high productive 50-sheet capacity one-path duplex scanning document processor.
- Low temperature fuser system for less power consumption.
- High printing quality with Fine 1,200 print resolution.

*For ECOSYS M2640idw




Professional Output

COPY/PRINT

- Convenient Multi-Purpose Tray First Mode: Allow printing via Multi-Purpose Tray whenever paper is loaded there.
- · Direct print from USB memory.
- · Save cost by using less paper. Print: Allow 25-in-1 Copy: Allow 4-in-1
- · 2-sided copy/print as standard.
- . High image quality with Fine 1,200dpl printing resolution.
- · Prevent envelop curling and wrinkles.
- Allow fast A5E paper path print up to 40 ppm.

SCAN

- Support mixed size A4/Letter and Legal original in Copy/Scan.
- · Skip Blank Page Function: Automatically skip blank page in copy and scan.
- · Fast scanning up to 40/23 lpm in A4 Mono/Color.
- Store scanned data easily by 'Scan to FTP', 'Scan to SMB', 'Scan to Email", "Scan to USB", "Scan to DFS"(Distributed File System).





FAX

- A destination and other transmission settings can be registered as a favor to prevent sending to wrong recipient.
- Capable of sending and receiving fax via PC with network fax function.
- · Fax broadcast up to 100 different destinations.



Impressive Security

- Authentication management among departments via IC Card.
- Sophisticated network security (SSL, IPsec) as standard and prevent improper access.
- Private Print enables secure print jobs with preset password request at the device.



Eco-Friendly

· Low energy consumption

Energy Star Ver. 2.0 certified.

Power consumption is low by using the new low temperature melting toner. Usage of white LED illumination for lower light emissions and power consumption.

- · Free of Hazardous material
 - Fulfill the requirements of RoHS (Restriction of Hazardous Substances) & usage of Lead-Free Parts.
- Reduce wastage with Long Life Consumables and Drums.
- Reduce noise by built-in Quiet Mode**.



Powerful Solutions

By combining the innovative Business Applications, these MFPs can manage document in an effective approach.

- KYOCERA MyPanel Remote control designated KYOCERA printing devices by smartphone or tablet.
- ON KUDCERA
- KYOCERA Net Managar*** Control sensitive documents and reduce printing costs.



 KYOCERA Mobile Print Conveniently print files, web pages and images using smartphone or tablet.



Print documents, photographs, Images, etc. directly from iOS devices/Mac.





HVPA5 *Enhance device performance to meet customers' special needs (Require additional memory card).

KYOCERA Cloud Connect



Teaching Assistant



PinPoint Scan



Born to be Extraordinary


KYOCERA Document Solutions is Extraordinary for

- Broad Range of Multifunction Devices and Printers
- Optimized Total Cost of Ownership (TCO)
- Reliable with Long Life Drum and Parts
- New and Advanced Technology


KYOCERA Document Solutions strives to be a company that contributes to the society and demonstrates "Customer First" principle by providing customers with maximum value to increase their satisfaction. By adhering to the mission of producing document management devices that take balance between "Economy" and "Ecology", KYOCERA Document Solutions succeeds to develop document management devices with advanced technologies which help customers to optimize office productivity and efficiency at a low total cost of ownership and, at the same time, improving environmental performance.

Simplify Document Workflow

These highly productive monochrome multifunctionals support business workgroup of all sizes by packing power and productivity in a small footprint. They deliver flexibility, high level of functionality and advanced reliability while reducing environmental impact which make them ideal for workgroups seeking for superior performance.

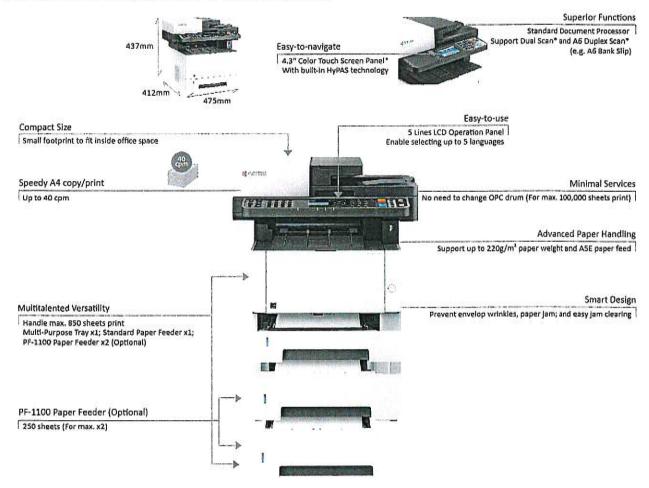

Trought Control	place in the		Main Specifications										
Model		The second second	ECOSYS M2040dn ECOSYS M2540dn	ECOSYS M2640idw									
			4	ESSAT S WEST-WAY									
Main Function			Copy, Print, Scan, Fax (ECOSYS M2540dn/M2640ldw only)										
Writing Method	-		Semiconductor Laser										
CPU			Cortex-A9 800 Mhz										
Print Speed (A4)	THE RESERVE AND ADDRESS OF THE PARTY OF THE		40 ppm										
Scanning Speed (Mono/Color)	(A4) 300dpi	Simplex	40/23 ipm										
		Duplex	32/16 lpm										
Memory			Standard 512M8 (Max. 1,536M8)	20 seconds									
Warm Up Time Paper Capacity	Standard		17 seconds 250 sheets (Cassette) + 100 sheets (MPT)	20 Seconos									
гарит сарасну	Maximum		850 sheets (Main Unit + 250 sheets PF-1100 x2 + MPT)										
	Cassette		Min, A6R - Max. A4 (Legal)										
Paper Size	Option	-	Min. AGR - Max. A4 (Legal)										
	MPT		Min. 70mm x 148mm · Max. A4 (Legal)										
Paper Weight	Cassette		60 - 163 g/m²										
	Option		60 · 163 g/m²										
	MPT		60 · 220 g/m²										
Duplex Printing	1.00.1		Paper size: ASR - A4/Legal; Paper weight: 60 - 163 g/m²										
Output Capacity			Max, 150 sheets face-down										
Control Panel			5 lines LCD (128 x 64 dot)	4,3 Inch Color Touch LCD Panel									
Document Proce	ssor		Standard (Max. 50 sheets one-path duplex scanning Type)										
Dimension (W x		it)	475mm x 412mm x 437mm	The state of the s									
Weight (Main Ur			Approx. 19.0kg										
Power Consump		nt Mode	661W										
(Standard	Stand-by	Administration of the last of	21W										
configuration)			IW										
	Energy S	Control of the Contro											
Noise ((507779/15092	Copy/Pri		52dB(A); 5ilent mode: 48dB(A)										
(1507779) 15092	96) Stand by	Mode	29d8(A)										
A CONTRACTOR			Copy Functions (Standard)										
Copy Size			Min, A6R - Max. A4 (Legal)										
Resolution			500 x 600 dpi										
First Copy Time (WALL STREET, S		6.4 seconds or less										
Zoom Ratio	Manual		25% - 400% (1% per Step)										
	Pre-defined		7RSE										
Multiple Copy	ATTORNA MARKANIA	-	1 999	AND THE RESIDENCE OF THE PARTY									
			Print Functions (Standard)										
Resolution			600 x 600 dpl, Fast 1200, Fine 1200										
PDL/Emulations			PCL6 (PCLSe, PCL-XL), KPDL3 (Postscript 3 compatible), PRESCRIBE, Line Printer, IBM Proprinter X24E, t	Epson LQ-850, PDF Direct Print Ver. 1.7									
First Print Out Ti			6.4 seconds or less	The second design to the second									
Supported Proto	col		NetBEUI, FTP, Port 9100, LPR, IPP, IPP over SSL, WSD Print, Apple Bonjour, IPsec, SNMPv3, IEEEB02.1x, FTP over SSL/TLS, POP3 over SSL/TLS, Enhanced WSD o										
Consession System	Sugnastad		Windows Server 2003, Windows Server 2008, Windows Server 2008 R2, Windows Server 201	Control of the Contro									
Operating System	ii zupporteu		Windows Vista, Windows 7, Windows 8, Windows 8.1, Windows 1	0;									
			Apple Macintosh OS X 10.5 or later; Linux										
Interface		-Water 025 to	USB 2.0 High Speedx1; Ethernet 10BASE-T/100BASE-TX/1,000BASE	-T;									
			USB Host Interface (USB Host)x1;										
	No. of the last		802.11 b/g/n/Wireless LAN/WiFI Direct (ECDSYS M2640idw only										
USB Memory Pri	nung Format		TIFF, IPEG, POF, XPS, Open XPS AIrPrint, Mogrig, KYOCERA mobile print	hard-and the second									
Mobile Printing	Mark Street	To the same of the		THE RESERVE WE HAVE A STREET									
No. of the Land	SALE OF MAIN		Scan Functions (Standard)										
Color Selection			Full Color; Grayscale; Black & White										
Resolution			600dpi, 400dpi, 300dpi, 200x400dpi, 200x400dpi, 200x100dpi	ted PDE									
File Format			TIFF, JPEG, XPS, PDF (MMR/JPG/High-compression PDF), PDF/A, Encryp Text, Photo, Text + Photo, Ught text + Fine line, OCR (mono)	(ed PDF									
Image Type Mod	(t-11-2)		Scan to SMB: Scan to E-mail : Scan to FTP or FTP over SSL; Scan to OFS: Scan to USB; TWA	NIN Sean: WSD Scan WIA									
Transmission Typ			200 addresses (Common address list), 50 groups (Group address li	A SANCE OF CONTRACT OF CONTRAC									
Address Storage	MANAGEMENT OF THE PARTY OF THE	ALTERNATION OF THE PARTY OF THE											
	THE REAL PROPERTY.		Fax Functions (ECOSYS M2540dn/M2640idw only)	CANAL PROPERTY OF THE PARTY OF									
Original Size			Min, A6 - Max. A4 (Logal)										
Coding Method			MMR, MR, MH, JBIG										
Transmission Spe	ed		33.6 kpbs										
Memory			3,5MB	100 numbers									
One Touch Dial			. 22 numbers	100 numbers									
Network FAX	Indiana de la compania del compania del compania de la compania del la compania de la compania d	A STATE OF THE PARTY OF THE PAR											
	E ST. Tribute		Consumables & Options	PAGE TO THE PAGE TO THE									
Toner Kit			TK-1178 (7,200 pages)										
(Page Yield in acc		O/ (EC 19752)											
Capacity of Start	up toner		3,600 pages										
Maintenance Kit			MK-1158 (100,000 pages) PF-1100: 250 sheets (Max. x2)										
Manager Parados													
Paper Feeder Card Authenticat	ian .		Card Authentication Kit(D)										





Kyocera Document Solutions India Pvt. Ltd. Second Floor, Tower C, Centrum Plaza, Golf Course Road, Sector - 53 Gurgaon - 122002 (Haryana) Tel: +91 124 467 1000

Fax: +91 124 467 1001 Email: contactus@did.kyocera.com Web: http://www.kyoceradocumentsolutions.co.in

*KYOCERA does not warrant that any specifications mentioned will be error-free. Specifications are subject to change without notice. Information is correct at time of going to press. All other brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.







KYOCERA Business Partner

TERMS AND CONDITIONS

Purchaser hereby agrees to the follow terms and conditions.





- 1. This order shall become binding once approved and accepted by National.
- 2. This order may not be cancelled or altered after acceptance without National's consent.
- 3. Seller shall not be liable for failure to deliver or for delays occasioned by causes beyond National's control, including without limitations, strikes, non-delivery or delays by shipper, carriers, or others, accidents or government acts.
- 4. National shall not be liable for any special, indirect or consequential damages, nor shall National be liable in any event for more than National's invoice price of any equipment or supplies.
- 5. This is a binding agreement and not a sale on approval or trial basis. Provisions of this agreement, once accepted by National, constitute the entire agreements between purchaser and National and supersede all other written or oral communication between the parties. National is specifically not bound by any oral or written representation made by its employees or salespeople to buyer which does not appear herein in writing.
- 6. All rights, title or interest to the equipment or supplies described herein shall remain the property of National (or its leasing agent) until paid in full.
- 7. Customer shall pay all Federal, State and Local sales, use, property, excise or other taxes imposed on or with respect to the equipment.
- 8. All invoices are due and payable with fifteen (15) days from the date of the invoice and buyer agrees to pay interest at a rate of 1.5% per month on any amounts not paid within those fifteen (15) days. All invoices are to be paid by cash or check.
- 9. Buyer shall pay all of National's cost in collection of any amount due hereunder, in the recovery of any property pursuant hereto or in the enforcement of its rights against buyer, including attorney's fees whether or not suit is brought.
- 10. Customer shall not assign this agreement or any interest herein without the proper written permission of National.
- 11. Equipment Environment: Customer shall provide proper electrical service to the Equipment and shall provide an environment that is reasonably free of dust, humidity, hazardous chemicals or erratic temperature changes. Failure to provide a proper Equipment Environment may negate the terms of this Agreement.
- 12. Purchaser hereby jointly and severally releases, acquits, forgives, and discharges National from any actions, claims, demands, suits, agreements, judgments, liabilities, and proceedings whether arising in equity or in law and in particular arising from the pick-up and disposal of Trade-in equipment. This release shall remain binding upon all successors in interest and personal representatives of the contracting parties, to the extent permitted by law.
- 13. In the event National issues a check to the customer to satisfy an existing lease obligation, National will not be responsible for any additional amounts owed on that existing lease in excess of the amount paid to the customer by National. National will not be responsible for any additional charges applied to the lease for any reason, including the customer's inability to obtain the information that is necessary to terminate the lease and return the lease equipment to that specific leasing company in a timely manner.
- 14. National makes no warranty expressed or implied, of the fitness a particular use or merchantability.

SERVICE AGREEMENT

- 1. This service agreement is for a period of 1 year and is non-refundable and automatically renewed at the end of the contract period for successive twelve month periods, unless notification in writing is received within thirty (30) days prior to renewal date. Contract rates shall be those in effect at the time of renewal.
 - a. Payment of such invoice shall be deemed an acceptance by the customer of the terms and conditions of the agreement. If payment is not received by National in accordance with payment terms, National at its option, may require a physical inspection of the equipment prior to acceptance, with all costs incurred billed to the customer.
- 2. National will install a Data Collection Agent (DCA for all networked devices at no additional charge to automate the meter read process
 - a. Client will be responsible for supplying billing read for all devices not reporting on a DCA under this agreement. In the event National cannot obtain an actual read for billing purposes, an estimate based on volume history will be used. If National is unsuccessful in obtaining an actual read for 3 consecutive months, on the third month there will be a \$25.0 charge per device for a Technician to be dispatched to client's location to obtain actual read.
- 3. National agrees to provide maintenance service availability Monday through Friday, excluding holidays, from 8:00AM to 5:00PM and to keep the equipment in good working order while operated in accordance with National's published specifications while the equipment is located in National's area of responsibility.
 - a. Service rendered under this agreement excludes any (a) service or parts required by damage caused by accident, neglect, misuse, altering the equipment, unfavorable environmental conditions, electric current fluctuations, work performed by other than a representative of National, or any force of nature. (b) service required due to the use of supplies not approved by National. (c) service connected with the unauthorized relocation of the equipment. In the event that the equipment is moved from the location set forth in this agreement then, at National's option, this agreement may be terminated and/or additional service charge may be made.
 - b. National agrees to provide toner in sufficient quantity as it relates to the customer's usage and the manufacturer's published yields which are based on the industry standards of 65 coverage on black & white and 25% coverage full color. In the event that the customer's actual yield varies from the manufacturer's published yields by more than 25%, National reserves the right to remedy this variance by either adjusting the amount of toner provided or adjusting the rate(s) of this agreement or invoicing the customers for excess toner used This does not apply to mailing systems.
 - c. In the event National cannot offer a regular maintenance contract because normal maintenance and parts replacement can no longer keep the equipment in satisfactory operational condition, a Conditional maintenance contract may be offered. If National cannot repair your equipment, your account will be credited with the unused portion of your Conditional maintenance contract. Any credit balance must be used towards future purchase with National.
 - d. For connected digital equipment, network support is not included under this agreement. All support calls made on network support issues shall be billable at National's current software labor rate.
- 4. All service calls made on equipment not under maintenance contract shall include all parts, labor and travel costs. These costs are invoiced at National's current prevailing rates.
- 5. National shall have full and free access to the equipment to provide service thereon.
- 6. National reserves the right to hold service in the event the customer account balance is delinquent based on the National payment terms in effect at that time.
- 7. Customer agrees that National shall not incur any liability to customer for any loss of business. Loss of production, loss of data, expenses, or any other damage, direct, indirect or consequential, arising out of or in connection with the use or performance of this equipment.
- 8. This service agreement is not assignable or transferable by customer to a third party, nor is any portion refundable. However, the service agreement is transferable to a new machine
- 3. Buyer shall pay all of National's cost in the collection of any amount due hereunder, in the recovery of any property pursuant hereto or in the enforcement of its rights against buyer, including any attorney's fees whether or not suit be brought.

Date



SHIP TO					BILL TO											
Albany County				Customer #	Name			Customer #								
Address				*	Address			•								
Address					Address		*									
City			State	Zip	City		State	Zip								
Contact			Email		Contact		E-mail									
Phone			Check Box if S to is SAME as		Phone		Fax									
ITEM#	QUANTITY	MA		MODEL		DESCRIPTION		PRICE								
								-								
		- X-X	·													
			3													
OTHER - LIS	t Below (INCLUDI	NG TRADES)	NAME OF TAXABLE PARTY.	NAME AND THE PARTY		Probablished Separate Land										
			Haracan Jan			DELIVERY										
Service inc	cluded in lease pay	ment														
						SUBTOTAL										
						TAX										
						TOTAL	☐ Month	ıly								
Снеск то	CUSTOMER	(学///学)														
☐ Exsisting Le	ease Obligation			Other												
Explanation	-															
SERVICE AGREEM	ENT COLOR	N. F. LOWIN	recent to	Salasticon a Country of the	TO THE DATE	CHARLES CHARLES	Mary of the late of the late of	SELECTION OF A COLUMN								
Street, Street	the latest terminal to the latest terminal termi	1 – Priority Se	ervice Guarar	nteed (Covers all parts.	labor, travel and	d supplies except paper and sta	ples)									
2020 10 10							X-10-12-20									
10 10				nonth. Excess at \$0per												
Billed at	\$Oper month, incl	udes OCOLOI	R copies per i	month. Excess at \$0per	сору.											
	OARD SERVICE A		IT: Billed at	\$ per mont	n.Covers all pa	rts, labor and travel. Exclude	s all consumab	les(toner, ink, image units,								
			NAME OF TAXABLE PARTY.	an en en en en en en en			A SHEET WATER OF THE									
ORDER ACCEPTAN	-			CHARLES IN VIOLEN	or many the M			Date								
NATIONAL Author	ized Signature							Date								
Customer Authori	zed Signature					Date										
Print Name of Aut	int Name of Authorized Signor															

Sales Order Schedule A Item# Make Model Description

Signature:	Date:



FMAudit Technical Whitepaper

Version 3.0

Table of Contents

Technica	l Whitepaper	. 1
Introd	luction	4
Overv	lew	. 4
How F	MAudit Works	. 4
	dit System Requirements	
	System Requirements	
Р	C/Server requirements for FMAudit Onsite:	. 5
F	irewall considerations (Port 80 or 443) Outbound:	. 5
N	letwork Requirements:	. 5
	C/Server requirements for FMAudit Java Onsite on Linux and MAC OS Systems (Optional installation): Linux OS ystem Requirements	
٨	AAC OS System Requirements:	. 6
Р	C/Printer requirements for using the Local Agent (Optional installation):	. 6
Data C	Collected and Encryption	. 6
1.2	Data Encryption	. 6
1.3	Security Concerns	. 6
1.4	Types of Information Collected	. 7
D	Device Attributes	. 7
С	overage and Meters	. 7
S	upplies	. 7
S	ervice	. 7
N	letwork Discovery	. 8
N	letwork Traffic	. 9
Local F	Printers	. 9
1.5	Local (USB) Device Support	. 9
N	Nanufacturer Support	. 9
٧	'irus Concerns	. 9
FMAu	dit Central Application	. 9
P	ermissions based User Management	9
Н	TTPS access	10
FI	MAudit Side-By-Side	10
1.6	Hosting	10
1.7	Secure Data Centers	10
Α	ccess control and physical security	10
Е	nvironmental controls	10
Р	ower	10



	Network	1:
	Fire detection and suppression	1:
	Network protection	13
	Backups	1
3	1.8 Version Management	1:
	Testing and Release Process	13
	Source Code Security	13
Dat	ta Privacy and Legislation	12
	General Data Protection Regulations (GDPR)	12
	Health Insurance Portability and Accountability Act (HIPAA) Regulations	12
	Federal Information Processing Standard (FIPS)	12
	Sarbanes-Oxley Regulations	12
	Gramm-Leach-Blifey Act (GLBA) Regulations	13
	Federal Information Security Management Act (FISMA) Regulations	13
	Payment Card Industry Data Security Standards (PCI DSS) Regulations	13
	Transport Layer Security (TLS) Updated Protocol Compliance	14
Ero.	quently Asked Questions (FAOs)	. 14

Introduction The purpose of this document is to provide a product line overview of the FMAudit Suite of Products from a technical perspective to help facilitate answers to the most common questions Information Technology teams will receive. Overview

The FMAudit suite of products deliver an enterprise class managed print solution that is very easy to use and deploy. It is architected and designed to take advantage of the advanced features and benefits of the Microsoft .NET platform so that it no longer requires a skilled technician to install software and configure and maintain the system. The FMAudit products cannot in any way be configured to perform a task beyond the ones for which it was designed. The transmission of data from the products to outside sources is tightly restricted. The products do not report any other details except for information of the equipment being monitored (i.e. type of equipment). No confidential information is ever transmitted out of the network via FMAudit products. The suite consists of the following components:

FMAudit Central: A website and backend system that houses all the data received from the FMAudit data collection tools. It is a "central repository" that allows you to view data using a browser, generate reports, configure alert workflows and notifications, and synchronize data with ERP systems for billing or supply fulfillment.

FMAudit Onsite: A data collection tool that automatically performs print assessments and monitors consumable levels, printer status, and error logs. This application is installed at the customer site and can perform print assessments automatically on a scheduled basis without human intervention. The data captured is sent to the Central website using HTTPS, HTTP, or if the customer prefers a propriety encrypted file.

FMAudit Viewer: A data collection tool embedded on a USB key to perform fleet assessments without the need to install software. The data is retained on the USB key for additional analysis and reporting.

FMAudit WebAudit: A data collection tool that is a part of the Central application. Fleet assessments are performed directly from a browser without installing any software. The data captured is sent directly to FMAudit Central.

FMAudit Local Agent: A data collection tool used to discover devices that are connected locally via a USB port or Parallel port. This application is installed at the workstation where the locally connected printer resides. The data captured is sent to one of the other data collection tools (WebAudit, Onsite, or Viewer).

How FMAudit Works

The core engine, which is the heart of every FMAudit product, correctly identifies and extracts data from networked printers, copiers and MFPs utilizing the protocols the devices support such the Simple Network Management Protocol (SNMP).

eci

FMAudit

FMAudit currently supports v1, v2c and v3 of the SNMP protocol. SNMP v3 provides increased packet protection to ensure information and communication is transmitted via reliable sources. Unlike SNMPv1 or v2, v3 is encrypted for increased security and requires both a username and a password. A benefit to using SNMP v3 is that network administrators can determine the encryption method as well as a strong username and password.

SNMP is a network protocol that facilitates the exchange of information between network devices extracting data from the Management Information Base (MIB) and other locations within the print device. The MIB is an internal database that most network-connected devices have as part of their anatomy. The MIB holds data such as the model name, toner levels and the current status of the printer.

FMAudit System Requirements

1.1 System Requirements

Printers, copiers and MFPs must have the SNMP protocol (Port 161) enabled for discovery and extraction of information. The SNMP protocol is a standard part of the Application Layer of the TCP/IP suite.

PC/Server requirements for FMAudit Onsite:

- 1GB RAM
- 400 MB Disk Space
- Microsoft .NET Framework 4.7.1 or newer
- Windows 7 SP1, 8.1, 10, 2008 R2 SP1, 2012, 2012 R2, 2016, 2019
- Internet Explorer 11.0 or newer, Chrome, Firefox
- MDAC 2.8 or higher (normally included when Windows is installed)
- JET 4.0 or higher (normally included when Windows is installed)
- Loaded on a machine that is up 24/7 or at least the entire business day
- Must be logged on as a Local Administrator (or equivalent) during the installation

Firewall considerations (Port 80 or 443) Outbound:

Data transmission:

- https://(company_Central_FQDN)/WebServices/Onsite2Service.asmx
- Application: fmaonsite.exe
- SOAP over HTTP(s) must be allowed past firewall

Network Requirements:

SNMP (Port 161) traffic must be routable across the LAN or WAN

PC/Server requirements for FMAudit Java Onsite on Linux and MAC OS Systems (Optional installation): Linux OS System Requirements

Administrator (Root) level permissions



- PC or Server with a 1 GHz Intel or AMD processor and 512MB of RAM
- Linux (CentOS, Raspbian, Debian, Fedora, Ubuntu, RHEL, SuSE)
- Java Runtime Environment 1.7 or later
- 400MB of available disk space
- Broadband Internet connection to contact the Central Server

MAC OS System Requirements:

- Administrator (Root) level permissions
- MAC with a 1 GHz Intel processor and 512MB of RAM
- MAC OS X 10.X or macOS Sierra or higher
- Java Runtime Environment 1.7 or later
- 400MB of available disk space
- Broadband Internet connection to contact the Central Server

PC/Printer requirements for using the Local Agent (Optional installation):

- Windows XP, Windows Vista, Windows 7, Windows 2003, Windows 2008
- Microsoft .NET Framework 2.0
- Current driver for the local printer (UPD is recommended for HP devices)
- Printer must support Printer Job Language (PJL) or Printer Management Language (PML)
- Remove any unused print drivers
- Driver's bi-directional support is enabled
- Windows Firewall modifications Port 161/33333 inbound/outbound for both TCP and UDP

Note that for recent OS versions using driver model 4 (e.g. Windows 10), only Kyocera and Ricoh OEMs, and their variations, are supported currently.

Data Collected and Encryption

1.2 Data Encryption

All data packages from FMAudit Onsite are encoded and obfuscated. FMAudit recommends utilizing HTTPS for communication Onsite and FMAudit Central. Additionally, all sensitive settings and jobs between Onsite and Central are encrypted using AES256 standard symmetric encryption algorithm, using a protected shared key. This ensures end-to-end encryption, so data is protected from being read if intercepted by a third party, a competitive or otherwise non-authorized FMAudit instance.

1.3 Security Concerns

FMAudit Onsite communicates with FMAudit Central by sending an encoded and obfuscated XML stream using the SOAP over HTTP(s) protocol. Confidential data is not collected, viewed or saved by any FMAudit application. Only printer-related data is collected and viewed. No other network data can be identified or collected by FMAudit Onsite, with the exception of IP Address, MAC Address, and HostName, which could be excluded from the data submitted if the user chooses to exclude these details.

eci

FMAudit

FMAudit Onsite does not collect or process any personal data and the only way the system will collect this type of information is if you or your customers input them into FMAudit within a field or label such as location or customer name. Onsite enables you to monitor network devices using Simple Network Management Protocol (SNMP). It exists inside the customer's network and from there, it communicates with devices to gather operational information about the device that is made available via the device firmware and an SNMP Management Information Base (MIB). The data exposed by the device varies by manufacturer and model, but it is always technical or operational in nature and specific to the device itself. At the most basic level the data exposed by a printer MIB is documented in the IETF RFC 3805 (https:// tools.ietf.org/html/rfc3805). Additional device information may be exposed by the manufacturer through extensions and private MIBs, but the information is fundamentally technical and device- specific.

1.4 Types of Information Collected

FMAudit Onsite attempts to collect the following information from networked printing devices during a network scan:

Device Attributes

- IP address (can be masked)
- Manufacturer
- Serial number
- Asset number
- MAC address
- Device description
- Location
- Miscellaneous (machine specific)

Coverage and Meters

- Meter reads
- Meter type
- Coverage level
- Monochrome or color identification

Supplies

- Toner cartridge serial number
- Toner cartridge supply level
- Drum levels
- Maintenance kit levels
- Non-toner supply levels
- Miscellaneous levels

Service

- LCD reading
- Device status
- Error codes
- Firmware



FMAudit Agent, explained further below, attempts to collect the following information from local devices:

- Manufacturer
- Asset number
- Device description
- Location
- Serial number
- Meter reads
- Supply levels (vendor dependent)
- Service codes (vendor dependent)
- Miscellaneous (machine specific)
- IP address of the machine the Agent is installed on (FMAudit Agent Host)

Network Discovery

The FMAudit patented Automatic Network Discovery Settings use a mixture of algorithms to identify the network ranges where print devices may be located and then discover and communicate with the devices that are online, routing through multiple network elements such as active workstations or servers, routers, hubs, switches, and additional network hardware.

FMAudit Central administrators can remotely manage Onsites that have been activated on the server as well as remotely trigger the Onsite to execute predefined commands such as data collection tasks, providing Onsite logs, running remote MIBWalks, installing HP JAMC, or updating Onsite settings. These are explained in further detail below:

Function	Location	Oescription
Tasks	Onsite Settings	Can remotely configure tasks to run on a preset schedule but can select tasks (Cache, Meters, Supplies, Service) to run immediately and collect device data on command.
MIB Walks	Onsite Settings	Can indicate certain IPv4/IPv6/Hostnames of devices and trigger the Onsite to Start the Collection of the MIB Walks immediately.
Logs (Detailed)	Onsite Settings	Can instruct the Onsite to collect the Logs (Critical, Error, Warning, Details, Debug) from a certain date.

None of these commands lead to data collection beyond the types of information collected as described above. Data exchanged between FMAudit Onsite and FMAudit Central is encrypted using strong encryption protocols that are FIPS compliant. Onsite receives secured software updates from the FMAudit Updates servers.

The Onsite communicates with Central at a predefined interval to determine if there are any queued actions which are not already executed, thus ensuring actions are executed in a timely manner.

Note: FMAudit Onsite always initiates this communication to the Central server, and not the other way around.





Network Traffic

Audits conducted by the software use an intelligent system to extract minimal information for each printer, copier or MFP. Unlike similar products that send a fixed set of queries (a superset of all possible queries) to every networked device, FMAudit Onsite only sends the relevant queries according to the fields the target device supports, with each device query being no more than a few kB of data. To further reduce the amount of network bandwidth used, FMAudit Onsite communicates with no more than 20 devices at a single time. Each IP within the configured ranges will be queried and if no response is received within the configured timeout period it will move onto the next IP address. A rule-of-thumb is that FMAudit will gather information on 65,000 devices in just under one hour.

Local Printers

1.5 Local (USB) Device Support

The FMAudit Agent is the only solution of its kind to extract information from one or more local printers attached to any Windows port type, such as USB and parallel. The Agent does not interrupt the printing job flow, it only activates when called upon by one of FMAudit's collection application tools—Viewer, Onsite or WebAudit— and then closes. The Agent collects specific information dependent upon the intelligence levels of the device from the engine and not the print spooler. Most common attributes reported are model, serial number, life-time meters, consumable coverage, consumable level, and service. FMAudit Agent may be deployed to the workstations using a solution such as Microsoft SMS. Reconfiguration of antivirus or software firewalls may be required if blocking the SNMP port 161 or the alternative Agent fallback port 333333.

Manufacturer Support

FMAudit products are manufacturer neutral. They support all of the major manufacturers and model families. Some devices have limitations that prevent extraction of certain information.

Virus Concerns

The FMAudit application files have been digitally signed to prevent execution if the file integrity is compromised. This ensures that any virus that may be present is not activated and prevents spreading the virus from one network to another. For additional assurance, we recommend using antivirus software on your network.

FMAudit Central Application

FMAudit Central functionality is accessible via a web-based user interface.

Permissions based User Management

Access to the FMAudit Central web console is controlled with permissions-based user management. Users must log in to Central using a designated username and password. Users are assigned one or more roles which specify permissions and

eci

FMAudit

are granted access to one or more groups of devices. Administrators will full permissions can specify exactly which screens each user can view and/or interact with.

HTTPS access

The website can be accessed using HTTPS via port 443 provided that the web server is installed with a valid SSL security certificate. Optionally, FMAudit Central Administrators can require users that access the website using HTTPS by redirecting the HTTP version of the website. We recommended all sites to use HTTPS as it ensures encryption of data being transferred over the Internet.

FMAudit Side-By-Side

FMAudit Central utilizes a Model Attributes Database termed as Side-by-Side, which contains various model attributes as printing speeds, when was introduced on the market or OEM Part Numbers compatibilities, which is periodically updated as future models and versions are released by OEMs. FMAudit Central will communicate with Side-by-Side to check for new updates as well as retrieve device attributes to cache them locally on each FMAudit Central system.

1.6 Hosting

FMAudit Central is able to be hosted by ECi Software Solutions within secure and protected datacenters within the US and the UK as well as hosted on premise based upon the needs of the dealer or reseller. ECi Software Solutions understands that the confidentiality, integrity, and availability of our customers' information is vital to their business operations and our own success. We use a multi-layered approach to protect that key information, constantly monitoring and improving our application, systems, and processes, to meet the growing demands and challenges of security.

1.7 Secure Data Centers

Our service is collocated in dedicated spaces at top-tier data centers. These facilities provide carrier-level support, including:

Access control and physical security

- 24-hour manned security, including foot patrols and perimeter inspections
- Biometric scanning for access
- Dedicated concrete-walled Data Center rooms
- Computing equipment in access-controlled steel cages
- Video surveillance throughout facility and perimeter
- Building engineered for local seismic, storm, and flood risks
- Tracking of asset removal

Environmental controls

- Humidity and temperature control
- Redundant (N+1) cooling system

Power

- Underground utility power feed
- Redundant (N+1) CPS/UPS systems



- Redundant power distribution units (PDUs)
- Redundant (N+1) diesel generators with on-site diesel fuel storage

Network

- Concrete vaults for fiber entry
- · Redundant internal networks
- Network neutral; connects to all major carriers and located near major Internet hubs
- High bandwidth capacity

Fire detection and suppression

- VESDA (very early smoke detection apparatus)
- Dual-alarmed, dual-interlock, multi-zone, pre-action dry pipe water-based fire suppression

Network protection

- · Perimeter firewalls and edge routers block unused protocols
- Internal firewalls segregate traffic between the application and database tiers
- Intrusion detection sensors throughout the internal network report events to a security event management system for logging, alerts, and reports
- A third-party service provider continuously scans the network externally and alerts changes in baseline configuration

Backups

- All data are backed up to tape at each data center, on a rotating schedule of incremental and full backups
- Tapes are not transported offsite and are securely destroyed when retired

1.8 Version Management

Testing and Release Process

Each major and minor release of the software goes through a quality control process, in which multiple FMAudit personnel will regression test altered portions of the system to ensure there has not been a downgrade in security or functionality of the system, as well as validate the new functional aspects. Major releases go through a beta release process where select clients run the new and old systems in parallel.

Source Code Security

FMAudit source code is kept in a secured revision control system, accessible only to authorized persons. Every change to the source code is tracked, which includes which developer made the change and why. Products are encrypted and digitally signed with a code-signing certificate before shipping. An escrow deposit can be made available based on request.



Data Privacy and Legislation

General Data Protection Regulations (GDPR)

As of May 2018, the European Union's General Data Protection Regulations (GDPR) came into full effect. The GDPR replaces the Data Protection Directive 95/46/EC and is designed to strengthen and unify data privacy laws across Europe.

FMAudit has implemented a structured and comprehensive GDPR compliance program to help ensure readiness for the regulation when it took place and has on-going compliance post-implementation. The program consists of, among other things, training of staff, audit and risk assessment across the business, policies and procedures, governance and ongoing compliance. We encourage our customers to take similar steps to ensure their own businesses are prepared for the GDPR when it takes effect and also for the years to come.

For more information on GDPR, visit https://eugdpr.org/

Health Insurance Portability and Accountability Act (HIPAA) Regulations

Health Insurance Portability and Accountability Act (HIPAA) aims to protect all medical records and other individually identifiable health information that is communicated, stored, or disclosed in any form. This goal prevails whether the information is being communicated electronically, in printed format or verbalized.

The FMAudit products are fully compliant with the HIPAA regulations as FMAudit products do not store, process, monitor or manage any patient records or any records or information that are specific to any one patient or group of patients. The product engine communications are controlled, using limited access to contact a specific IP address and/or range. All communications must originate from the FMAudit products, and there is no way to contact and access the products from outside the network. The communication outside of the network uses a proprietary, compressed data stream that is sent using industry-standard SSL over HTTPS.

For more information about HIPAA, visit http://www.hhs.gov/ocr/privacy/

Federal Information Processing Standard (FIPS)

The Federal Information Processing Standard Publication 140-2, (FIPS PUB 140-2), is a United States government computer security standard used to approve cryptographic modules. The standards describe document processing, encryption algorithms, and other information technology standards.

The FMAudit Onsite data collection tool and FMAudit Central is fully compliant with FIPS regulations and standards.

Sarbanes-Oxley Regulations

Sarbanes-Oxley compliance is not affected by usage of FMAudit or Onsite software applications as FMAudit software is not intended to be used as part of an internal control structure as outlined in Section 404: Management



Assessment of Internal Controls but will not interfere with these controls. Information Technology controls are an important part of complying with Sarbanes-Oxley. Under this Act, corporate executives become responsible for establishing, evaluating and monitoring the effectiveness of internal control over financial reporting. There are IT systems in the market that are designed specifically for meeting these objectives.

FMAudit software is not designed as an IT control system but will not interfere or put at risk other systems that are intended for that purpose.

For more information about Sarbanes-Oxley, visit http://www.sec.gov/about/laws/soa2002.pdf

Gramm-Leach-Bliley Act (GLBA) Regulations

Gramm-Leach-Billey Act (GLBA) compliance is not affected by usage of FMAudit or Onsite software applications as the use of FMAudit software applications are not seen to have an impact on compliance with the Gramm-Leach-Billey Act (GLBA) for covered entities. This is because FMAudit software applications do not collect, house or transmit any information regarding the content of print jobs, so have no way of accessing, housing or transmitting customers' personal financial information, even if this information is printed or otherwise sent to print devices monitored by FMAudit software applications.

For more information about the Gramm-Leach-Bliley Act, visit http://business.ftc.gov/privacy-and-security/gramm-leach-bliley-act

Federal Information Security Management Act (FISMA) Regulations

Federal Information Security Management Act (FISMA) compliance is not affected by usage of FMAudit or Onsite software applications as FMAudit software applications are not intended to be part of an internal control system for FISMA but will not interfere with these controls. The use of FMAudit software applications are not seen to have an impact on compliance with FISMA for covered entities. This is because FMAudit software applications do not collect, house or transmit any information regarding the content of print jobs, so have no way of accessing, housing or transmitting high risk information, even if this information is printed or otherwise sent to print devices monitored by FMAudit software applications.

For more information about the FISMA, visit http://csrc.nist.gov/groups/SMA/fisma/index.html

Payment Card Industry Data Security Standards (PCI DSS) Regulations

PCI DSS (Payment Card Industry Data Security Standards) compliance is not required for FMAudit or Onsite software applications as the PCI DSS was developed to encourage and enhance cardholder data security and facilitate the broad adoption of consistent data security measures globally. The PCI DSS standards apply to all organizations that store, process or transmit cardholder data. These organizations must be PCI DSS compliant.

The use of FMAudit solutions does not have an impact on PCI DSS compliance. FMAudit software applications do not store, process or transmit cardholder data or personal information. FMAudit solutions also does not collect, house or transmit any information regarding the content of print jobs, so has no way of

accessing, housing or transmitting customers' personal financial information, even if this information is printed or otherwise sent to print devices monitored by FMAUDIT software.



For more information about PCI DSS compliance, visit <a href="https://www.pcisecuritystandards.org/security_standa

Transport Layer Security (TLS) Updated Protocol Compliance

Transport Layer Security (TLS) is a protocol that secures data communicated between clients/servers via the internet. It is a more secure version of its predecessor, Secure Sockets Layer (SSL). TLS provides data privacy and integrity, encrypting data to ensure no third-party can read or tamper with it while transmitted to a client/server.

A connection with potential weaknesses, such as TLS 1.0, could expose sensitive data such as usernames, passwords and credit card numbers. As a result, security standards like the Payment Card Industry Data Security Standard (PCI DSS) have been updated to require the use of newer TLS versions that address these weaknesses and use stronger encryption. As of July 1st, 2018, TLS 1.0 will no longer be compliant by PCI security standards and so merchants must update to TLS 1.1 or higher prior to this date to continue processing card payments. Again, it is important to note that PCI security standards do not apply to FMAudit solutions as the software does not store, process or transmit cardholder data. However, recommendations in the PCI security standards, specifically the use of TLS 1.1 and higher, may indirectly affect applications like the FMAudit Onsite data collection agent that communicates via the internet.

FMAudit Onsite was built on Microsoft .NET Framework 2.0, which originally did not support TLS 1.1 and TLS 1.2 because these protocols were released after it was created. Onsite v3.7.4 or newer supports TLS 1.1 and 1.2 if the latest Windows Updates and some OS-specific Hotfixes are installed. TLS 1.1 and TLS 1.2 are not available for Windows XP, Server 2003, Vista and Server 2008, so if TLS 1.0 is disabled on the Central server then these systems will not be able to communicate with Central. FMAudit Central v4.3.63 and newer include FMAudit Onsite v3.7.4 that will automatically attempt to install the required Hotfixes for each host OS version where the application is installed.

Frequently Asked Questions (FAQs)

Do FMAudit products work with Internet proxies?

Yes, Onsite is able to work with most proxies. In the user interface of the Onsite there are options to configure different proxy settings. This is also possible from the Onsite Settings within the FMAudit Central UI under the Proxy settings.

How does the FMAudit Viewer USB key work?

FMAudit Viewer USB is installed and licensed on an approved USB key. When plugged in to a recipient computer, this key will be seen as a removable drive. The FMAudit Viewer software is run directly from this key. No software is transferred to or installed onto the computer.

What are the FMAudit Central, Onsite and Viewer minimum requirements?

The FMAudit Products, may be run on any modern Windows operating system (in 32- and 64-bit modes) including: Windows 7 SP1, 8.1, 10, 2008 R2 SP1, 2012, 2012 R2, 2016, 2019



Detailed hardware and software requirements can be found at the following URL: ftp://ftp.fmaudit.com/customer/documents/Software-Requirements.pdf

Is FMAudit Products compatible with Mac, Linux, or Raspberry Pi environments?

FMAudit Java Onsite is available to be run on a Mac, Linux, or Raspberry Pi environment and can be enabled within the Integrations and Features section under Admin and Server tabs. Information gathered by the Java Onsite tool will be displayed in FMAudit Central in the same way as the standard Windows OS Onsite does.

Does the FMAudit Viewer require Internet access?

Generally no, except for Licensing and some of the Dynamic Reports that need to connect to FMAudit Side- by-Side services. For the action of performing audits on end-users' networks, you do not require Internet access. FMAudit Viewer does communicate over the Internet to verify licensing when running specific reports.

Does FMAudit Onsite require Microsoft Internet Information Services (IIS)?

No. FMAudit Onsite includes its own server to display the web pages and is set up automatically during the installation.

Can you install FMAudit Onsite on a computer which already hosts another IIS website?

Yes. FMAudit Onsite uses port 33330 by default, but this may also be configured to use a different port if required.

How much ongoing maintenance does FMAudit Onsite require?

FMAudit Onsite is a service which runs in the background and performs audits and exports to configured destinations on predefined schedules. It's recommended to use subnets (IP ranges) instead of fixed IPs so that when adding new devices to the network they will be discovered and included in the audit results, limiting manual intervention.

How does the FMAudit WebAudit process work?

From FMAudit Central, the dealer specifies the end-user's (customers) applicable billing cycle. At this time, an email is automatically generated and sent to the appropriate contact informing them it is time to collect their meters. The instructions include a URL whereby when the end-user clicks the link, it automatically launches their web browser, ready to perform the action. The end-user then clicks "'start" and "'save". Done. No software is installed at any time. A link to the WebAudit page may also be posted on the dealers existing website, i.e. Enter Meter Readings web page. This allows the user to automate the collection, rather than having to manually walk from device to device, print the configuration page and transcribe the meters.

How do I get additional information for FMAudit Central, FMAudit Onsite, etc?

Additional information can be found on the FMAudit website: http://www.fmaudit.com/

COUNTY OF ALBANY

COST PROPOSAL FORM

PROPOSAL IDENTIFICATION:

Title: PHOTOCOPIER LEASE AND

MAINTENANCE AGREEMENT

Solictation Number: 2022-021

THIS PROPOSAL IS SUBMITTED TO:

Karen A. Storm, Purchasing Agent Albany County Department of General Services Purchasing Division 112 State Street, Room 1000 Albany, NY 12207

- 1. The undersigned Proposer proposes and agrees, if this Proposal is accepted, to enter into a Contract with the owner in the form included in the Contract Documents to complete all Work as specified or indicated in the Contract Documents for the Contract Price and within the Contract Time indicated in this Proposal and in accordance with the Contract Documents.
- 2. In submitting this Proposal, Proposer represents, as more fully set forth in this Contract, that:
 - (a) Proposer has examined copies of all the Contract Documents and of the following addenda: (If none, so state)

Date Number

None

(receipt of all of which is hereby acknowledges) and also copies of the Notice to Proposers and the Instructions to Proposers;

- (b) This Proposal is genuine and not made in the interest of or on behalf of any undisclosed person, firm or corporation and is not submitted in conformity with any agreement or rules of any group, association, organization or corporation; Proposer has not directly or indirectly induced or solicited any other Proposer to submit a false or sham Proposal; PROPOSER has not solicited or induced any person, firm or a corporation to refrain from Proposing; and Proposer has not sought by collusion to obtain for himself any advantage over any other Proposer or over the owner.
- 3. Proposer will complete the Work for the following prices(s): (Attach Proposal)
- 4. Proposer agrees to commence the Work within the number of calendar days or by the specific date indicated in the Contract. Proposer agrees that the Work will be completed within the number of Calendar days or by the specific date indicated in the contract.

John	Arabio
iarabi	o@national1927.com

6. Terms used in this Proposal have the meanings assigned to them in the Contract and General Provisions.

COUNTY OF ALBANY

COST PROPOSAL FORM

PHOTOCOPIER LEASE AND MAINTENANCE AGREEMENT

PROPOSAL IDENTIFICATION:

Solictation Number: 2022-021

Title:

DATE

COMPANY:	National Business Technologies
ADDRESS:	15 Corporate Circle
CITY, STATE, ZIP:	Albany, NY 12203
ΓEL. NO.:	518-724-6455
FAX NO.:	
FEDERAL TAX ID NO.:	26-2693993
REPRESENTATIVE: SIGNATURE AND TITLE	John Arabio Ola Caz - Buines Manager
DATE	19097

Device Type	Ite	em No.	Department	Minimum Speed- Copies Per Minute (CPM)	Estimated Annual Volume	Machine Make & Model	Actual Copies/Minute (CPM)	Equipment Lease Price/Quarter	Total Equipment Lease Price 16 Quarters	Usage (Per Copy/Print Charge)	Staple Cartridge (item# and Package Count)	Cost for Hard Drive Surrender	DF-7100	DP-7150	Stand	Surge Protector	DF-7140	PF-7150	BF-730	FAX	PF-7140	DP-7160	AK-7110	DF-7120	32 GB SD Card	Data Security
Α		3.	Children Youth & Families 112 State Street, 3rd Floor Room 300 Albany, NY 12207	40	132,000	Kyocera Taskalfa 4004l	40	\$186.45	\$2,983.20	B&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	х	x	×	×								1 Harris 1 1 August 1 1	NILOW TO A THOUGHT	×
A		2	Children Youth & Families Childrens Mental Health Unit 260 South Pearl Street Albany, NY 12202	40	96,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	B&W ≂ \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	×	×	×										×
В		3	Children Youth & Families 112 State Street, 4th Floor Room 400 Front Albany, NY 12207	50	190,000	Kyocera Taskalfa 5004i	50	\$287.84	\$4,605.44	B&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	1 - THE PERSON AND A STATE OF THE PERSON AND	X		жентического посмотован. Ж	X	X	X	**************************************			×			×
A		4	County Clerk 16 Eagle St, Room 128 Front Counter Albany, NY 12207	40	20,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	8&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	×	×	×										×
A		5	County Coroners 112 State Street 7th Floor Room 735 Albany, NY 12207	30	10,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	B&W ≠ \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	×	×	×						4/ Partie o 10 Telephone 1 1 1 1 1 1				×
A		6	County Legislature Minority Counsel's Office 112 State Street Room 1360 Albany, NY 12207	35	40,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	B&W ≃ \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	×	×	x										×
C	~~~	7	District Attorney Community Outreach Office 155 Clinton Ave Albany, NY 12207	40	8&W 23,000 Color 10,000	Kyocera Taskalfa 4054ci	40	\$250.47	\$4,007.52	B&W = \$0.0047/print Color = \$0.0275/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	X	×	x	X				ISAN PERSONA PINA MININA ANALYSINE		A18 TO TAME TO SECURE TO SECURE				×
A		8	Immigration 112 State Street Room 900 Back Office Albany, NY 12207	40	11,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	B&W = \$0.0047/print	5H-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	×	×	x										х
A		9	General Services 112 State Street, Basement Central Supply Albany, NY 12207	35	12,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	8&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	*	X	X	01.4M7-4M87-444-211-411-41	W.110044 POST 11411 US POST 7 PROF								×
Д		10	General Services 112 State Street, Room 1315 Code Enforcement Albany, NY 12207	35	25,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	B&W = \$0.0047/print	SH-10 (\$,000 pcs x 3 catridge/case) \$65.00	\$200	x	X	X WARRING TO A STATE OF THE STA	K K	an monorous manuscra totalors	IVITIMAAAT COCOOTTON	**************************************							ж
A		11	General Services 112 State Street, Room 1300 Commissioners Office Albany, NY 12207	40	27,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	B&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	x	×	×	×										×
E		12	Health Department 175 Green Street 1st, Floor Nursing Unit Albany, NY	60	104,000	Kyocera Taskalfa 6004i	60	\$256.38	\$4,102.08	8&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200		x		x					×		×	×		×
Д		13	Health Department 175 Green Street 2nd Floor Environmental Unit Albany, NY	40	97,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	B&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	x	×	×	X										×
G			Hockey Facility 830 Albany Shaker Road Albany, NY	40	7,000	Ecosys M2540	40	\$32.84	\$525.44	8&W = \$0.0047/print	N/A	N/A				×									×	
ŗ		15	Mental Health 175 Green Street 1st Floor Albany, NY	60	28,000	Kyocera Taskalfa 6004i	60	\$279.69	\$4,475.04	8&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200		x		×				×	×		X	X		X

.

Device Type	Item No.	Department	Minimum Speed- Copies Per Minute (CPM)	Estimated Annual Volume	Machine Make & Model	Actual Copies/Minute (CPM)	Equipment Lease Price/Quarter	Total Equipment Lease Price 16 Quarters	Usage (Per Copy/Print Charge)	Staple Cartridge (Item# and Package Count)	Cost for Hard Drive Surrender		OP-7150	Stand	Surge Protector	DF-7140	PF-7150	BF-730	FAX	PF-7140	DP-7160	AK-7110	DF-7120	32 GB SD Card	Data Security
F	16	Mental Health 840 Albany Shaker Road Forensic Unit @ACCF Albany, NY 12211	60	46,000	Kyocera Taskalfa 6004i	60	\$279.69	\$4,475.04	B&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200		x		x				×	×		×	x		х
Н	17	Nursing Home 100 Heritage Lane Human Resources Albany, NY 12211	35	28,000	Kyocera Taskalfa 3554cı	35	\$262.40	\$4,198.40	B&W = \$0.0047/print Color = \$0.0275/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	×		x		×		×						к
ō	18	Nursing Home 100 Heritage Lane Dietary Albany, NY 12211	40	30,000 8&W 95,000 Color	Kyocera Taskalfa 4054ci	40	\$298.18	\$4,770.88	8&W = \$0.0047/print Color = \$0.0275/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	×		x					x					x
A	19	Nursing Home 100 Heritage Lane C-Unit 1st Floor Albany, NY 12211	35	112,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	8&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	x	x	×	x										×
I	20	Nursing Home 100 Heritage Lane Mail Room 1st Floor Albany, NY 12211	50	120,000	Kyocera Taskalfa 5004ì	50	\$204.41	\$3,270.56	B&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	×	×	×										×
A	21	Public Defender 30 Clinton Ave Family Court Office Albany, NY 12211	35	37,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	B&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	x	x	×	×										×
l	22	Public Defender 1 Morton Ave, 1st Floor City Court Office Albany, NY 12211	50	60,000	Kyocera Taskaffa 5004i	50	\$204.41	\$3,270.56	B&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	x		x					×					x
•	23	Public Works 449 New Salem Road Engineering Unit Albany, NY 12186	50	61,000	Kyocera Taskaifa 5004i	50	\$221.47	\$3,543.52	B&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	x		x					×					×
C	24	Sheriff's Office 58 Verda Ave Clarksville NY 12041 Patrol Station/Public Safety	40	32,000	Kyocera Taskalfa 4054ci	40	\$250.47	\$4,007.52	B&W = \$0.0047/print Color = \$0.0275/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	×	x	×										×
к	25	Sheriff's Office 58 Verda Ave Clarksville NY 12041 Criminal Investigations Unit	35	19,000 B&W 10,000 Color	Kyocera Taskalfa 3554ci	35	\$218.15	\$3,490.40	8&W = \$0.0047/print Color ¤ \$0.0275/print	5H-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	X	×	×	×			**************************************							×
L	26	Sheriff's Office Civil Office (Court House) 16 Eagle Street Room 79 Albany NY 12207	50	55,000 B&W 50,000 Color	Kyocera Taskalfa 5054ci	50	\$320.03	\$5,120.48	8&W = \$0.0047/print Color = \$0.0275/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×		×	×				x		×				X
А	27	Sheriff's Office 6 Lodge Street, Basement Transportation Unit Albany, NY 12207	40	18,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	8&W = \$0.0047/print	\$H-10 (5,000 pcs x 3 catridge/case) \$65.00		×	X	×	X										×
A	28	Social Services 162 Washington Ave 3rd Floor (Copier A) Albany, NY 12210	40	255,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	B&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	×	×	×										×
A	29	Social Services 162 Washington Ave 3rd Floor (Copier B) Albany, NY 12210	40	242,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	8&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	×	×	x										×
A	30	Social Services 162 Washington Ave 1st Floor (A) Albany, NY 12210	40	100,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	6&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00		×	×	×	X		A COLUMN TO COLU		THE PARTY OF THE P						×

Device Type	Item No	Department	Minimum Speed- Copies Per Minute (CPM)	Estimated Annual Volume	Machine Make & Model	Actual Copies/Minute (CPM)	Equipment Lease Price/Quarter	Total Equipment Lease Price 16 Quarters	Usage (Per Copy/Print Charge)	Staple Cartridge (Item# and Package Count)		DF-7100	DP-7150	Stand	Surge Protector	DF-7140	PF-7150	BF-730	FAX	PF-7140	DP-7160	AK-7110	DF-7120	32 GB SD Card	Data Security
A	31	Social Services 162 Washington Ave 1st Floor (8) Albany, NY 12210	40	36,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	B&W = \$0.0047/print	5H-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	х	×	х										×
A	32	Social Services 162 Washington Ave 1st Floor C Back of Bidg Albany, NY 12210	40	34,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	8&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	x	ĸ	×								30 La 20	70 T - 2000 V - 2020	×
A	33	Social Services 162 Washington Ave 4th Floor Albany, NY	40	143,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	8&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	×	х	х							2011			×
A	34	Social Services 162 Washington Ave 5th Floor Albany, NY	40	178,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	B&W ± \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	×	×	X						'				x
Д	35	Sociał Services 30 Clinton Ave Family Court Albany, NY	40	37,000	Kyocera Taskalfa 4004i	40	\$186.45	\$2,983.20	B&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	×	×	×										×
м	36	Probation 60 South Pearl Street Albany, NY 12207	50	50	Kyocera Taskalfa S004i	50	\$225.34	\$3,605.44	8&W = \$0.0047/print	SH-10 (5,000 pcs x 3 catridge/case) \$65.00	\$200	×	×		×		х								×